




■平键
螺纹沉孔型

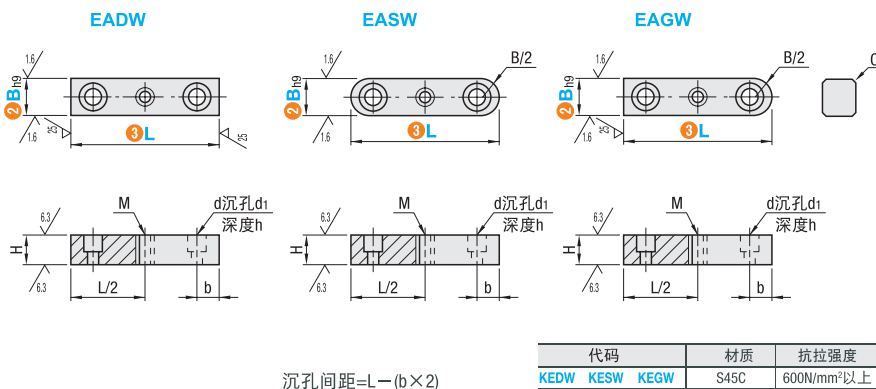

型号(1代码·2B) — 3L — 4MPC
EADW8 — 35
EADM5 — 30 — MPC8


■请按步骤①~④选择型号和参数后进行订购。



型号区分: 7天发货

型号			3 L	H 公差		d	d ₁	h	b	M	C	L	公差
1 代码	2 B _{h9}		最小单位5mm							(粗牙螺纹)			
EADW EASW EAGW	8	0	35~ 80	7	0 -0.090	3.4	6	3.5	8	M3	0.25~0.40	~ 50	0 -0.25
	10	-0.036	45~ 80	8		4.5	7.5	4.5	10	M4	0.40~0.60	51~ 80	0 -0.30
	12	0 -0.043	50~ 80	9		5.5	9.5	5.5	12	M5		81~110	0 -0.35
	14		50~ 90						14				
	15		50~ 90						15				
	16		60~100	10					16				
	18		60~110	11					6.6				11

■平键
螺纹拆卸型

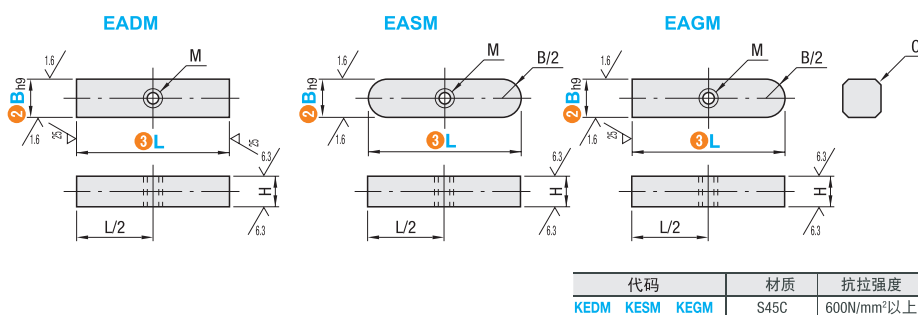

型号			3 L	H 公差		M	C	L	公差
1 代码	2 B _{h9}		最小单位5mm			(粗牙螺纹)			
EADM EASM EAGM	5	0	10~ 50	5	0	M3	0.25~0.40	~ 10	0
	6	-0.030	10~ 60	6	-0.030			11~ 15	0
	7	-0.036	15~ 60	7	0			16~ 30	0
	8		15~ 80		-0.036	M4	16~ 30	0	
	10		15~ 80		8		M5	31~ 50	0
	12	20~ 80	0	51~ 80				0	
	14	30~ 90	-0.090	M6		81~110		0	
	15	30~ 90	9		0.40~0.60	51~ 80	0		
	16	40~100				10	81~110	0	
	18	40~110		11			0	-0.30	



可选加工



4 代码

MPC

技术说明

变更螺纹孔位置。
MPC=指定单位1mm
螺纹拆卸型
M≤MPC≤L-M



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRO仕瑞达