



直线轴承/滚珠导向组件

直柱型直线轴承 单衬型



型号(①代码·②d)
ADMU10


■ 请按步骤①~②选择型号和参数后进行订购。



型号区分:
⑤ 天发货



① 代码	外壳			滚珠 材质	保持器 材质	使用环境温度	附件
	材质	硬度	表面处理				
ADMU	SUJ2	58HRC~	-	SUJ2	树脂	-20~80°C	密封圈 材质 丁腈橡胶
ADMUA			无电解镀铬				

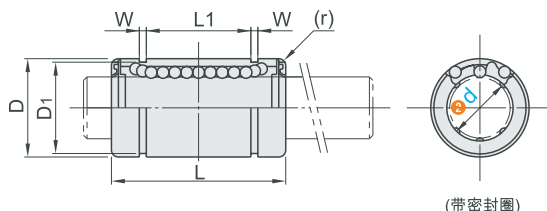

型式			D公差			L		L1		W	D1	r	偏心 (最大)	滚珠 列数	参考重量 (g)		
① 代码	② d	公差	无表面处理	有表面处理	公差	公差	公差										
ADMU ADMUA	3	0 -0.005	7	0	0	10	-	-	-	-	-	0.3	0.008	4	1.35		
	4		8	0	0	12	-	-	-	-	-	1.9					
	5		10	-0.009	-0.015	15	-0.12	8	-	9.6	4						
	6		12	0	0	19	-	11.3	1.1	11.5	7.6						
	8	0 -0.006	15	-0.011	-0.018	24	-	15.3	1.3	14.3	0.4	0.012	15				
	10		19	0	0	29	-	19.4		18			29.5				
	12		21	0	0	30	-	20.4		20			31.5				
	13		23	-0.013	-0.021	32	-0.2	22		43							
	16	28	37	23.3	1.6	27	0.8	27.3	69								
	20	32	42	37.3		30.5		87									
	25	0 -0.007	40	0		0		59	1.85	38	1.5		0.015	5	220		
	30		45	-0.016		-0.025		64		40.8					43	250	
	35		0 -0.008	52	0	0	70	2.1		49		1.5			0.020	6	390
	40			60	-0.019	-0.030	80			56.3							57
	50	80		100	68.8	2.6	76.5		1580								

① d = 3-4 无密封圈, 请注意防尘。

② d	基本额定负载	
	C (动) N	Co (静) N
3	69	105
4	88	127
5	167	206
6	206	265
8	274	392
10	372	549
12	510	784
13	510	784
16	774	1180
20	882	1370
25	980	1570
30	1570	2740
35	1670	3140
40	2160	4020
50	3820	7940

国际单位 1N = 0.102kgf

② d	轴径	固定座直径	
	g6公差	H7公差	
3	-0.008	7	+0.015
4	-0.008	8	0
5	-0.004	10	+0.018
6	-0.012	12	0
8	-0.005	15	+0.021
10	-0.014	19	0
12	-0.006	21	+0.025
13	-0.017	23	0
16	-0.006	28	+0.030
20	-0.007	32	0
25	-0.020	40	+0.030
30	-0.009	45	0
35	-0.009	52	+0.030
40	-0.025	60	0
50	-0.025	80	0

※与导向轴的配合·固定座组装推荐采用上表的公差。

