

外螺纹型等高螺栓（自由指定型）

轴径公差g6·h7

螺丝/螺帽

螺丝·螺帽

29



型号(1代码·2D)
EBGDMS6.5

3L
30

4F
F12

5M
M5

■ 请按步骤1~5选择型号和参数后进行订购。




型号区分: 7天发货

■ 外螺纹型等高螺栓
—轴径公差 g6·h7—




代码	D公差	材质	硬度	强度分类
EBGDMS	g6	SCM435	33~38HRC	10.9
EBGDSMS		SUS304	—	A2-50
EBHDSMS	h7	SCM435	33~38HRC	10.9
EBHDSMS		SUS304	—	A2-50

√(6.3/1.6/6)

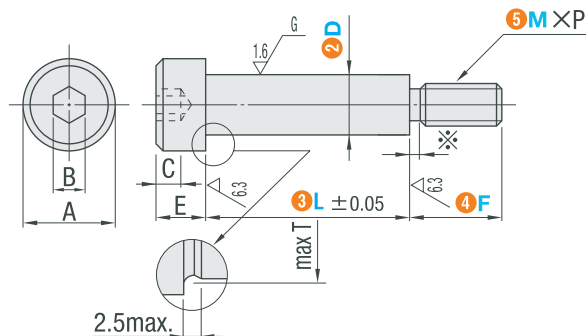

M=D时

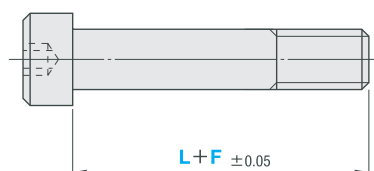

※M=D时不带退刀槽，F为螺纹有效长度。因此，L尺寸中会产生螺距量约为1~2的不完整螺纹部。

型号		3L 最小单位 0.1mm	4F 最小单位 0.5mm	5M	D公差		A	B	C	E	T	L+F 加工条件
1 代码	2 D				g6	h7						
(g6) EBGDMS EBGDSMS	4	10~40	3~ 8	3 4	-0.004 -0.012	0 -0.012	7	2.5	1.6	3	4.5	L+F≤46
	4.5	10~40	3~ 8	3 4							5	
	5	10~40	4~10	3 4 5			9	3	2.2	3.5	5.5	L+F≤47
	5.5	10~40	4~10	3 4 5							6	
(h7) EBHDSMS EBHDSMS	6	10~40	5~12	4 5 6	-0.005 -0.014	0 -0.015	10	4	2.5	5	6.5	L+F≤59
	6.5	10~40	5~12	4 5 6							7	
	8	10~40	6~16	5 6 8			13	5	3	6	8.7	L+F≤70
	10	10~40	8~20	6 8 10			16	6	4	8	10.8	L+F≤72



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达