

法兰一体型无油衬套

铜合金标准法兰内径F7型·内径G6型

无油衬套




型号 ① 代码 · ② d f7 — ③ L
AFTZ12 — 30
AFTP16 — 35

■ 请按步骤①~③选择型号和参数后进行订购。



型号区分: ④ 代码 7 天发货

■ 标准法兰型 内径F7·G6型

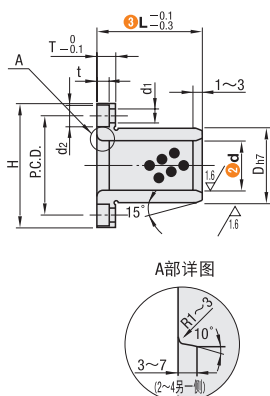

圆法兰型
AFTZ (内径F7)
AFTP (内径G6)

d=6~13 2-安装孔

d=16~50 4-安装孔

方法兰型
AFTSZ (内径F7)

4-安装孔

4-安装孔

两面切削法兰型
AFTNZ (内径F7)
AFTNP (内径G6)

2-安装孔

4-安装孔

材质 高强度黄铜合金类 镶嵌石墨 附件 短头内六角螺栓2~4个

型号		③ L	Dh7	H	T	t	d1	d2	P.C.D.	W	F	A	附件 短头内六角螺栓
① 代码	② df7												
内径F7型 AFTZ AFTSZ AFTNZ	6	15 20	10	25	4	2.2	3.5	6	17 20	17	—	17	M3-10×2 * (4)
	8	20 25	12	27	4	2.2	3.5	6	19 22	19	—	19	
	10	20 25 30	14	29	5	3	4.5	7.5	21 23	21	—	21	
	12	20 25 30	18	36	6	3.7	5.5	9	26 28	26	—	26	M4-12×2 * (4)
	13	20 25 30 35	19	37	6	3.7	5.5	9	27 29	27	—	27	
	16	20 25 30 35 40	22	40	6	3.7	5.5	9	30 31	18	24	24	
	20	25 30 35 40 50	28	49	8	4.2	6.6	11	38 38	22	31	31	M5-16×4
	25	30 35 40 50 60	33	54	8	4.2	6.6	11	43 42	25	35	35	
	30	35 40 50 60 70	38	63	8	4.2	6.6	11	50 50	30	40	40	
	35	50 60 70	44	69	10	5.2	9	14	56 54	36	43	43	M6-20×4
	40	60 70 80	50	82	10	5.2	9	14	66 64	38	54	54	
	50	70 80 100	62	94	10	5.2	9	14	78 73	50	60	60	

* () 为AFTSZ的螺栓数量

型号		③ L	Dh7	H	T	t	d1	d2	P.C.D.	F	A	附件 短头内六角螺栓
① 代码	② dg6											
内径G6型 AFTP AFTNP	6	15	10	25	4	2.2	3.5	6	17	—	17	M3-10×2
	8	20	12	27	4	2.2	3.5	6	19	—	19	
	10	25	14	29	5	3	4.5	7.5	21	—	21	
	12	25 30	18	36	6	3.7	5.5	9	26	—	26	M4-12×2
	13	25 30 35	19	37	6	3.7	5.5	9	27	—	27	
	16	25 30 35 40	22	40	6	3.7	5.5	9	30	18	24	
	20	30 35 40	28	49	8	4.2	6.6	11	38	22	31	M5-16×4
	25	30 35 40	33	54	8	4.2	6.6	11	43	25	35	
	30	35 40 50	38	63	8	4.2	6.6	11	50	30	40	



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRO仕瑞达