



无油衬套

铜合金止推型



■ 请按步骤①~③选择型号和参数后进行订购。

型号 ①代码 · ②d) — ③ L
AFGZ10 — 15

型号 ①代码 · ②d) — ③ L
AFSZ12 — 15

型号 ①代码 · ②d) — ③ L
AFKZ10 — 20




型号区分:

代码


7 天发货

■ 止推型

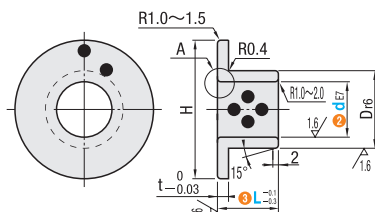




AFGZ (标准型)

6.3 / (1.6 /)



d=6~40

d=50






AFSZ (平头螺栓孔型)



d=6~12

d=15~50



AFKZ (短头螺栓孔型)

材质 高强度黄铜合金类 镶嵌石墨

无油衬套

05

AFGZ
(标准型)

型号		③ L										Dre		H	t
① 代 码	② de7														
AFGZ (标准型)	6	±8.838	10	12							12	+ 0.034 + 0.023	22	3	
	8	+0.040	10	12	15					14	25				
	10	+0.025	10	12	15	20				16	30				
	12		10	12	15	20	25			18					
	13			12	15	20	25				19	+ 0.041 + 0.028	35	5	
	15	+0.050		12	15	20	25				21		40		
	16	+0.032		12	15	20	25	30			22		45		
	18			14	20	25	30	35			24		50		
	20			14	20	25	30	35	40			28	55		
	25	+0.061		14	20	25	30	35	40			33	65		
	30	+0.040			20	25	30	35	40			38	70		
	35				20	25	30	35	40			44	9 0		
	40	+0.075				25	30	35	40	45	50	50	8		
	50	+0.050					30	35	40	45	50	60	8		

型号		③ L		Dm6		AFSZ 安装孔		AFKZ 附件	
① 代码	② d _{F7}					H	P.C.D	短头内六角螺栓	t
AFSZ	6	±8.838	10 12	10 ±8.838	25 15	17	25	M3-10×2个	4
	8	+0.028	12 15	12 +0.018	28 18	19	27		
	10	+0.013	12 15 20	14 +0.007	30 20	21	29		
	12		12 15 20	18	40 28	26	36		
	15	+0.034	12 15 20	21		29	39	M4-12×2个	5
	16	+0.016	12 15 20 25 30	22 +0.021	50 35	30	40		
	18		20 25 30	24 +0.008		32	42		
	20		20 25 30 35 40	28		38	49		
	25	+0.041	20 25 30 35 40	33	55 40	43	54	M5-16×4个	6
	30	+0.020	20 25 30 35 40	38 +0.025	60 45	45	63		
	35		20 25 30 35 40	44 +0.009	70 52	50	69		
	40	+0.050	20 25 30 35 40	50	80 60	56	82	M6-20×4个	8
	45	+0.025	25 30 35 40 45	50		66	88		
	50		30 35 40 45	62 ±0.030 +0.011	100 75	78	94		

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613