



型号(1代码·2A)
DBZB25

■ 请按步骤①~②选择型号和参数后进行订购。



型号区分:
代码 7 天发货


■ V型块 精密级



代码	材质	硬度	表面处理
DBZB	SKS3	58~62HRC	—
DBZBB			发黑
DBZBM			无电解镀镍

(参考: 中心高度H2的求法)
 $H_2 = \sqrt{2} \times \frac{L}{2} + h$

① ※检查尺寸H1
DBZB25时为 26.57±0.02
DBZB38时为 34.07±0.02
(使用φ10±0.001的检查销规)

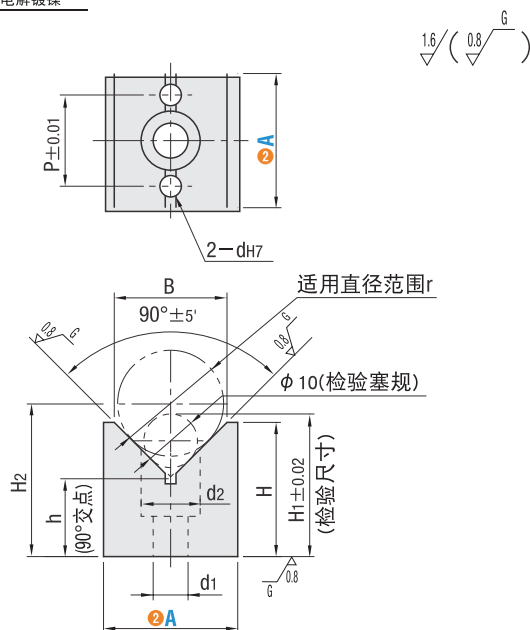

型号		B	H	h	P	dH7	d1	d2	适用直径范围 r
代码	A								
DBZB	25	21	25	14.5	17	4	6.5	11	4~25
DBZBB	25	21	25	14.5	17	4	6.5	11	4~25
DBZBM	38	32	38	22	28	5	9	14	5~38



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达