



定位销/夹具衬套



夹具衬套

带肩型·薄壁型



选型示范

型号(①代码·②d)

DAHU5

— ③L

8

■ 请按步骤①~③选择型号和参数后进行订购。



交货期

型号区分:

代码

7 天发货

定位销
夹具衬套


20

■ 薄壁型



代码		材质	表面处理	硬度
D尺寸p6	D尺寸m6			
DAHUP	DAHU	SUJ2 或 SKS3	—	淬火硬度58HRC~
DAHUNP	DAHUN		无电解镀镍	淬火硬度58HRC~
DAHUCP	—	SUS440C	—	淬火硬度50~55HRC

25/ (6.3/ 0.4) G

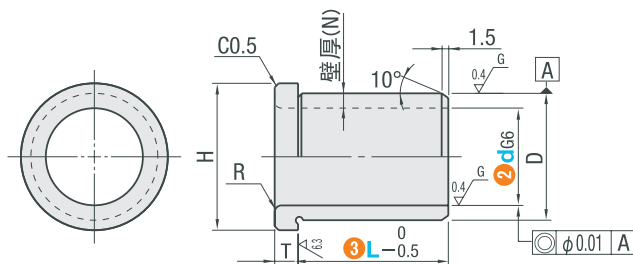

①无电解镀镍产品的d尺寸3~6的公差为H7。

d	d公差	
	无表面处理	无电解镀镍
3	+0.008 +0.002	+0.010 0
4	+0.012 +0.004	+0.012 0
5		
6		
8	+0.014 +0.005	+0.014 +0.005
10	+0.017 +0.006	+0.017 +0.006
12		
13		
15		
16		
20	+0.020 +0.007	+0.020 +0.007
25		

D	D公差	
	p6	m6
5	+0.020	+0.012
6	+0.012	+0.004
7	+0.024 +0.015	+0.015 +0.006
8		
10		
13	+0.029	+0.018
15	+0.018	+0.007
17	+0.035 +0.022	+0.021 +0.008
19		
21		
26	+0.042 +0.026	+0.025 +0.009
31		

型号		③L选择							D	H	壁厚 (N)	T	R		
①代 码	②d														
<p6> DAHUP DAHUNP DAHUCP	<m6> DAHU DAHUN	3	6	8	10	12			5	9	1	2.5	0.5		
		4	6	8	10	12	15	16	6	10	1	3	0.5		
		5	6	8	10	12	15	16	20	7	11	1	3	0.5	
		6	6	8	10	12	15	16	20	8	12	1	3	0.5	
		8	6	8	10	12	15	16	20	10	14	1	4	0.5	
		10	6	8	10	12	15	16	20	13	17	1.5	4	0.5	
		12		8	10	12	15	16	20	15	19	1.5	4	0.5	
		13			10	12	15	16	20	17	21	2	5	1	
		15				12	15	16	20	19	24	2	5	1	
		16				12	15	16	20	25	21	26	2.5	5	2
		20				12	15	16	20	25	26	31	3	6	2
		25							20	25	31	36	3	6	2

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613