

直柱型直线轴承

间隙调整型

直线轴承/滚珠导向组件





型号(① 代码 · ② d)
ADAU16

■ 请按步骤①～②选择型号和参数后进行订购。



型号区分:
代码 5 天发货

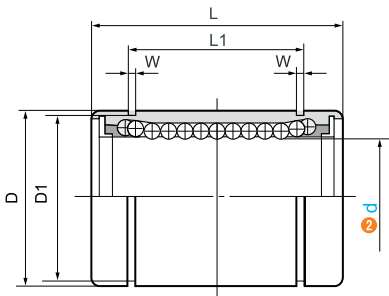

型号			D		L		L1		W	D1	K	偏心	最大 间隙	钢珠 列数	参考 重量
① 代码	② d	公差		公差		公差		公差							
ADAJ	6	0 - 0.009	12	0	19	0 - 0.2	13.5	0 - 0.2	1.1	11.5	1.0	0.012	-0.003	4	7.5
	8		15	- 0.011	24		17.5		1.1	14.3					14.7
	10		19		29		22		1.3	18					29
	12		21	0	30		23		1.3	20					31
	13		23	- 0.013	32		23		1.3	22					42
	16	0 - 0.010	28		37	0 - 0.3	26.5	0 - 0.3	1.6	27	1.5	0.015	-0.006	5	68
	20		32	0	42		30.5		1.6	30.5					85
	25		40	- 0.016	59		41		1.85	38					216
	30		45		64		44.5		1.85	43					245
	35		52		70		49.5		2.1	49					384
	40	0 - 0.012	60	- 0.019	80		60.5		2.1	57	2.5	0.020	-0.010	6	579
	50		80		100		74		2.6	76.5					1560

② d	基本额定负载	
	C (动) N	Co (静) N
6	205	265
8	275	392
10	371	550
12	510	784
13	510	784
16	774	1180
20	885	1370
25	980	1570
30	1570	2740
35	1670	3140
40	2160	4020
50	3820	7940

国际单位1N = 0.102kgf

滚珠直线轴承
组件

04



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达