



# 直线导轨



## 直线导轨夹具

中载·重载直线导轨用



型号  
AGSCN24



型号区分: 7 天发货  
代码



耐热温度: -20~80℃

| 代码    |       | 零件名称   | 材质     | 表面处理 |
|-------|-------|--------|--------|------|
| 旋钮型   | 把手型   |        |        |      |
| AGSCN | AGSCK | ① 主体   | S45C   | 无电解镍 |
|       |       | ② 左右螺丝 | SCM435 | 发黑   |
|       |       | ③ 夹紧块  | S45C   | —    |

### ■ 紧固扭矩和保持力

● 7N·m以上



保持力(参考) 1200N

④ 夹紧块开度范围


H24...10~22mm H36...17~36mm  
H28...14~28mm H42...21~56mm  
H30...15~30mm H42G...21~56mm  
H33...16~40mm

### ■ 组装尺寸



#### 旋钮型 AGSCN

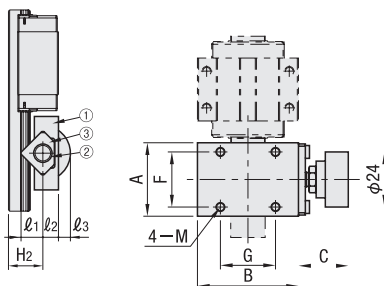

(AGSCN42 型)



#### 夹紧把手型 AGSCK



| 型号             |    | A  | B  | F  | G  | C     |       | E  | T    | H1   | H2   | l1   | l2   | l3  | M<br>(粗牙螺纹) |
|----------------|----|----|----|----|----|-------|-------|----|------|------|------|------|------|-----|-------------|
| 代码             |    |    |    |    |    | AGSCN | AGSCK |    |      |      |      |      |      |     |             |
| AGSCN<br>AGSCK | 24 | 32 | 44 | 24 | 24 | 21.7  | 43    | 10 | 10.5 | 16.3 | 17.2 | 9.5  | 6.8  | 5.2 | M4          |
|                | 28 | 35 | 50 | 25 | 25 | 21.7  | 43    | 10 | 11.5 | 17.3 | 20.2 | 9.5  | 7.8  | 4.2 | M5          |
|                | 30 | 38 | 54 | 28 | 28 | 21.7  | 43    | 11 | 11.0 | 18.3 | 22.7 | 11.0 | 7.3  | 4.7 | M5          |
|                | 33 | 38 | 62 | 26 | 26 | 21.7  | 43    | 10 | 14.0 | 19.8 | 22.7 | 9.5  | 10.3 | 1.7 | M6          |
|                | 36 | 42 | 60 | 30 | 30 | 21.7  | 43    | 11 | 13.0 | 20.3 | 26.7 | 11.0 | 9.3  | 2.7 | M6          |
|                | 42 | 46 | 80 | 32 | 32 | 21.7  | 43    | 11 | 18.0 | 25.3 | 27.7 | 11.0 | 14.3 | —   | M8          |

