



联轴器

十字形联轴器 夹持型/止动螺丝型



型号(①代码·②D) — ③d1 — ④d2
CAOC20 — 6 — 8

■请按步骤①~④选择型号和参数后进行订购。




型号区分: ④ 7 天发货


■夹持型



CAOC (夹持型)

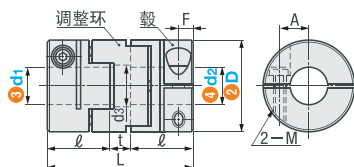


CAOCLK (带键槽孔 d1)
CAOCRK (带键槽孔 d2)
CAOCWK (带键槽孔 d1、d2)

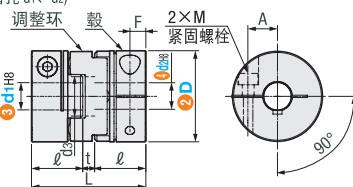


■止动螺丝型



CAOLK (带键槽孔 d1)
CAORK (带键槽孔 d2)
CAOWK (带键槽孔 d1、d2)

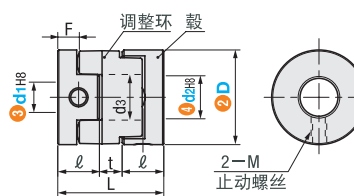

CAOLK (带键槽孔 d1)
CAORK (带键槽孔 d2)
CAOWK (带键槽孔 d1、d2)

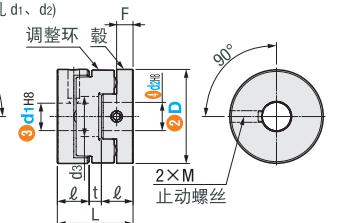

型号		③d1、④d2 选择 (但d1 ≤ d2)		d3	L	ℓ	t	F	A	止动螺丝·锁紧螺栓 紧固扭矩 (N·m)	
①代码	②D									M	
CAOC·CAOCRK CAOCLK·CAOCWK	16	*5	*6	7	29	12.5	4	3	5	M2.5	1
	20	*6	*6.35 8	9	33	14	5	3	6.5	M3	1.5
	25	*6.35 8 10		11	39	16.5	6	3.8	9	M4	2.5
	32	8 10 11 12 14		14.5	45	19	7	4.5	11	M5	4
CAO·CAORK CAOLK·CAOWK	16	*3	*4 *5 *6 *6.35	7	18	7	4	3.5	—	M3	0.7
	20	*4	*5 *6 *6.35 8	9	23	9	5	4.5	—	M4	1.7
	25	*5 *6 *6.35 8 10		11	28	11	6	5.5	—	M5	4
	32	8 10 12 14		14.5	33	13	7	6.5	—	M6	7


① d1、d2带*号的无键槽孔规格产品。

■特性值

型号	容许扭矩 (N·m)	容许偏角 (°)	容许偏心 (mm)	最高转速 (r/min)	惯性矩 (kg·m²)	重量 (g)
代码	D					
CAOC·CAOCRK CAOCLK·CAOCWK	16	0.7	1.0	10000	4.4×10 ⁻⁷	11
	20	1.2	1.5		1.2×10 ⁻⁶	20
	25	2.0	2.0		3.3×10 ⁻⁶	37
	32	4.5	2.5		1.4×10 ⁻⁵	70
CAO·CAORK CAOLK·CAOWK	16	0.7	1.0	10000	2.2×10 ⁻⁷	6
	20	1.2	1.5		6.9×10 ⁻⁷	13
	25	2.0	2.0		2.1×10 ⁻⁶	23
	32	4.5	2.5		6.5×10 ⁻⁶	45

① 惯性力矩、重量为最大轴径时的值。

■键槽尺寸



轴孔直径 d1·d2	b		t		键公称 尺寸 b×h
	基准 尺寸	容差	基准 尺寸	容差	
6~7.9	2	±0.0125	1.0	±0.1	2×2
8~10	3	±0.0125	1.4	±0.1	3×3
10.1~12	4	±0.0150	1.8	±0.1	4×4
12.1~17	5	±0.0150	2.3	±0.1	5×5
17.1~22	6	±0.0180	2.8	±0.1	6×6
22.1~24	8	±0.0180	3.3	±0.1	8×7

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613