




■ 请按步骤①~⑥选择型号和参数后进行订购。

型号 (① 代码 · ② 安装孔形状变更) · ③ 连续孔数) — ④ R — ⑤ S — ⑥ P
FCA T 2 — R2 — S2 — P15
FCANCP T 3 — R5 — S5 —




型号区分: 7 天发货
代码

代码					材质	表面处理	最高使用压力
间距(P)固定型			间距(P)指定型				
边长20	边长25	边长35	边长20	边长35			
FCANC	FCA	FCANL	FCANCF	FCANLP	铝合金	—	1MPa≈10kgf/cm ² 以下
—	FCAA	—	—	—		本色阳极氧化处理	

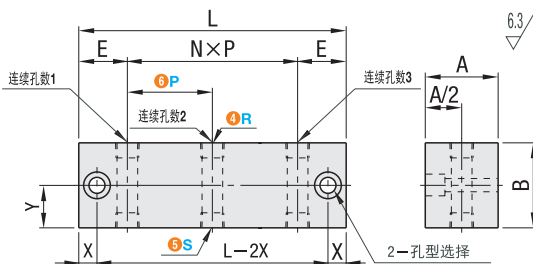

● 安装孔基本形状






安装孔尺寸	d	D	h	D1	d1	h1
M4	4.3	—	—	—	—	—
M5	5.5	9.5	5.5	8	4.2	4.5
M6	6.6	11	6.5	9.5	5.1	5.5

● 安装孔形状变更

② 通孔 (NA)

② 螺孔 (T)

② 沉孔螺孔 (ZT)



型号			Rc (PT), NPT, M (粗牙螺纹) 选择		⑥ 间距P		等分数	R、S	A	B	E	X	Y	安装孔
① 代码	② 安装孔形状变更	③ 连续孔数	④ R · ⑤ S	固定型	指定型	最小单位1mm	N	螺孔孔总数						M
(边长20) 孔距固定型 孔距指定型 FCANC FCANCP	T (螺孔)	1	1(1/8) M3(M3) M4(M4) 5(M5)	—	—	15~50	0	2	20	20	20	5	10	M5
		2					1	4						
		3					2	6						
		4					3	8						
		5					4	10						
		6					5	12						
		7					6	14						
		8					7	16						
(边长25) 孔距固定型 FCA FCAA	NA (通孔)	1	1(1/8) 2(1/4) 5(M5) 1N(NPT1/8) 2N(NPT1/4)	—	—	20~60	0	2	25	25	20	7.5	12.5	M5
		2					1	4						
		3					2	6						
		4					3	8						
		5					4	10						
		6					5	12						
		7					6	14						
		8					7	16						
(边长35) 孔距固定型 孔距指定型 FCANL FCANLP	ZT (沉孔螺孔)	1	2(1/4) 3(3/8) 4(1/2)	—	—	35~60	0	2	35	35	25	7.5	17.5	M6
		2					1	4						
		3					2	6						
		4					3	8						
		5					4	10						
		6					5	12						
		7					6	14						
		8					7	16						

① R · S 请用 () 前的 1 · 2 · 5 · 1N · 2N 指定。

② 连续孔数为 6 · 8 时, L/2 上有安装孔; 连续孔数为 7 时, 左数 2 · 3 通、5 · 6 通的 P/2 上有安装孔。



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD 仕瑞达