




■六角型

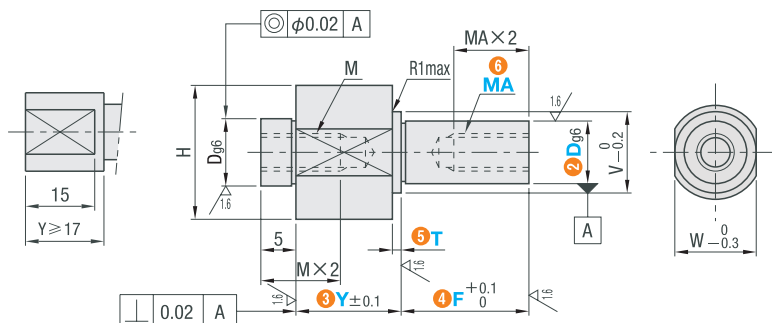

代码	材质	表面处理
BDFMB	S45C	发黑
BDPFMB		无电解镀镍
BDSFMB	SUS304	—

 $\frac{6.3}{\nabla} / \left(\frac{1.6}{\nabla} \right)$ 

悬臂销·铰链销
支点用台阶螺丝

12



型号(1代码·2D)	3Y	4F	5T	6MA
BDFMB20	20	F70	T5	MA6
BDSFMB12	10	F100	T2	MA6

■ 请按步骤①~⑥选择型号和参数后进行订购。



型号区分: **7** 天发货

型号	②Dg6		最小单位1mm		选择		M 粗牙螺纹	V	H	W
① 代码			③Y	④F	⑤T	⑥MA(粗牙螺纹)				
BDFMB BDPFMB BDSFMB	6	—0.004 —0.012	4~60	5~75	1 3 5	3	M3	8	14	12
	8	—0.005 —0.014				4	M4	10	17	14
	10				4 5 6	M6	13	21	18	
	12	—0.006 —0.017		10~100	2 5 8	5 6 8	M8	15	24	21
	15					6 8 10		18	28	25
	20	—0.007 —0.020				8 10 12		24	36	32
	25					8 10 12 16		29	43	38
	30					8 10 12 16		34	50	44

螺纹规格	有效长度	底孔深度
M3	6	11
M4	8	14
M5	10	17
M6	12	20
M8	12	25
M10	20	29
M12	24	34
M16	32	44



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达