



直线导轨

◀ 微型直线导轨 宽幅型 带定位孔滑块加长型



型号(1)代码·(2)H — (3)L
AGLWPN12 — 200

■ 请按步骤①~③选择型号和参数后进行订购。





型号区分: 7 天发货




耐热温度: -20~80℃


材质 硬度	代码	滑块数量
	微预压型 精密级	
不锈钢 56HRC~	AGLWPN	1
	AGLW2PN	2

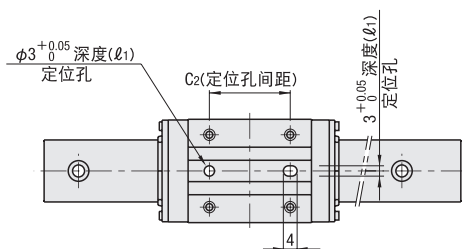

H9 · 12 · 14



H16

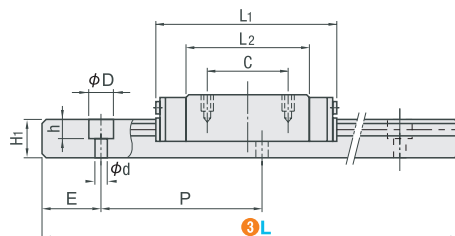


型号		2H	3L	滑块尺寸							定位孔尺寸			导轨尺寸					
1 代码				W	L ₁	B	C	S×ℓ	L ₂	K	N	C ₂	(ℓ ₁)	W ₁	W ₂	H ₁	沉孔 d×D×h	P	E
(单滑块) (双滑块) AGLWPN AGLW2PN	9	50~290	25	42	19	19	M3×3	32.5	1.7	12.5	19	2.5	14	5.5	5.5	3.5×6×3.2	30	最小单位1mm。 (E尺寸为两端均分)	
	12	60~290	30	50.5	23	24	M3×3	40.4	2.5	15	24	2.5	18	6	7	3.5×6×4.5	30		
	14	110~470	40	59	28	28	M3×3.5	46.3	3.2	20	28	3.5	24	8	8	4.5×8×4.5	40		
	16	110~670	60	74.9	45	35	M4×4.5	59.9	13	30	35	4	42	9	9.5	4.5×8×4.5	40		

国际单位1N=0.102kgf


H	基本额定负载		静态容许力矩			重量	
	C(动) kN	Co(静) kN	MA N·m	MB N·m	MC N·m	滑块 kg	导轨 kg/m
9	1.65	3.9	12	12	27.2	0.032	0.49
12	2.5	5.2	20	19.8	47.5	0.05	0.95
14	3.8	8.2	37.2	38.2	103	0.11	1.3
16	7.1	14	85	85	302.5	0.21	2.89

■ 预压与精度基准



单位: μm

规格	微预压型 精密级	普通间隙型 普通级
高度H的尺寸公差	±20	±20
宽度W2的尺寸公差	±25	±25
成对高度H公差	±15	±40
成对高度W2公差	±20	±40



询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613