

# 定位销 大头圆锥型

DP公差·锥头R选择型

# 定位销/夹具衬套



定位销  
夹具衬套

20



■ 请按步骤①~④选择型号和参数后进行订购。

型号(①代码·②D公差·③P公差·④D)

DAKPBA M10  
DASKPBA S5

— ⑤P — ⑥L — ⑦B — ⑧E — ⑨R  
— P12.00 — L10 — B4.0 — E6.0 — R20  
— P8.00 — L8 — B5.0 — E3.0 — R10




型号区分:

代码

7 天发货



代码	材质	表面处理	硬度
DAKPBA	SKS3	—	淬火硬度60~63HRC
DAGKPBA	SKS3	镀硬铬 厚度3 μm以上	淬火硬度50~55HRC 镀层硬度750HV~
DACKPBA	SUS440C	—	淬火硬度50~55HRC
DASKPBA	SUS304	—	—

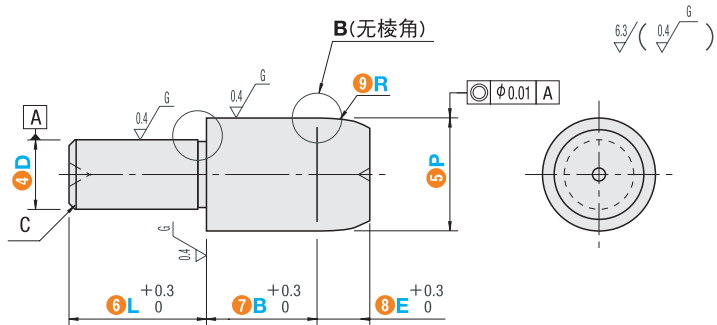

### ■ 公差选择


D 或 P	②·③D·P公差					S
	M	P	G	H	—	
2.00	+0.008	+0.012	-0.002	0	-0.01	—
3.00	+0.002	+0.006	-0.008	-0.010		
3.91	+0.012	+0.020	-0.004	0		
6.00	+0.004	+0.012	-0.012	-0.012		
6.01	+0.015	+0.024	-0.005	0		
10.00	+0.006	+0.015	-0.014	-0.015		
10.01	+0.018	+0.029	-0.006	0		
18.00	+0.007	+0.018	-0.017	-0.018		
18.01	+0.021	+0.035	-0.007	0		
30.00	+0.008	+0.022	-0.020	-0.021		



D < 3时  
a = 0.5  
d = D - 0.1



D ≥ 3时  
a = 1.0  
d = D - 0.2

① B 放大图



(i) D = P 但公差不同时

(ii) D = P 但公差相同时



型号				⑤P	⑥L	⑦B	⑧E	⑨R选择	C
①代码	②D公差选择	③P公差选择	④D	最小单位0.01mm	最小单位1mm	最小单位0.5mm	最小单位0.5mm		
DAKPBA DAGKPBA DACKPBA DASKPBA	M P G H	M P G H S	2	2.00~4.00	4~10	2.0~10.0	1.0~20.0	5 10 15 20 25 30 35 40	0.5
			3	3.00~6.00	5~12	2.0~10.0			0.5
			4	4.00~7.00	5~12	2.0~10.0			1
			5	5.00~8.00	5~12	2.0~10.0			1
			6	6.00~10.00	5~12	3.0~12.0			1
			8	8.00~13.00	8~15	3.0~14.0			1.5
			10	10.00~15.00	8~15	3.0~16.0			2
			12	12.00~16.00	10~18	3.0~18.0			2
			13	13.00~18.00	12~20	3.0~20.0			2
			16	16.00~25.00	14~25	3.0~20.0			3
			20	20.00~30.00	18~32	3.0~20.0			3

① 最小单位的值取决于P尺寸。请确认“E尺寸·R尺寸详细最小单位范围”表。

### ■ E尺寸·R尺寸详细最小单位范围

P 最小单位0.01mm	E 最小单位0.5mm	R选择
2.00~4.00	1.0~2.0	5 10
4.01~8.00	2.5~4.0	10 15
8.01~12.00	4.5~7.0	10 15 20
12.01~16.00	5.0~10.0	15 20 25
16.01~20.00	5.0~15.0	20 25 30
20.01~25.00	5.0~15.0	25 30 35
25.01~30.00	5.0~20.0	30 35 40



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD 仕瑞达