




■ 六角型



代码	材质	表面处理
BDLCC	S45C	发黑
BDPLCC		无电镀锌
BDSLCC	SUS304	—

6.3/(1.6/)

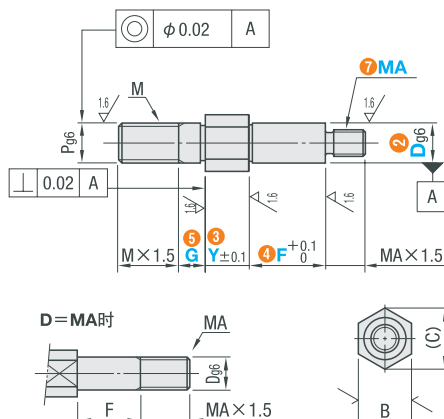


悬臂销·铰链销
支点用台阶段螺丝

12

型号		最小单位 1mm			7MA (粗牙螺纹) 选择	Dg6	M (粗牙螺纹)	B	(C)
1 代码	2 Dg6	3 Y	4 F	5 G					
BDLCC BDPLCC BDSLCC	3	2~30	3~50	3~8	3	3	M3	6	6.9
	4				3	4	M4		
	5				3	4	5	7	8.1
	6	2~60	5~75	5~10	4	5	6	8	9.2
	8				5	6	8	10	11.5
	10				6	8	10	13	15
	12		10~75	5~15	6	8	10	12	14
	15				8	10	12	17	19.6

① 外螺纹退刀槽加工尺寸



粗牙螺纹			
螺纹直径 (M · MA)	g	r	f
3	1.2~1.5	0.2~0.3	2.1~ 2.4
4			2.9~ 3.2
5			3.9~ 4.1
6	1.5~2.5	0.2~0.6	4.3~ 4.9
8			6.3~ 6.6
10			8.1~ 8.3
12	1.5~3.0	0.2~1.0	9.8~10.1

