

定位销 大头锥角型

外螺纹型·内六角孔型

定位销/夹具衬套



型号(①代码·②D) — ③P — ④L — ⑤B — ⑥M
 FPNSA10 — P12.00 — L5 — B5.0
 SFPNSD16 — P19.50 — L14 — B10.0 — M12

■请按步骤①~⑥选择
 型号和参数后进行订购。




型号区分: ⑦天发货
 代码



代码		材质	表面处理	硬度
圆型	多棱型			
DAFNSA	DAFNSD	SKS3	—	淬火硬度60~63HRC
DAGFNSA	DAGFNSD	SKS3	镀硬铬 厚度3 μm以上	淬火硬度50~55HRC 镀层硬度 750HV~
DACFNSA	—	SUS440C	—	淬火硬度50~55HRC
DASFNSA	DASFNSD	SUS304	—	—

D尺寸公差

D	g6
3	-0.002 -0.008
4	-0.004 -0.012
5	-0.005 -0.017
6	-0.006 -0.020
8	-0.007 -0.020
10	-0.007 -0.020
12	-0.007 -0.020
16	-0.007 -0.020
20	-0.007 -0.020

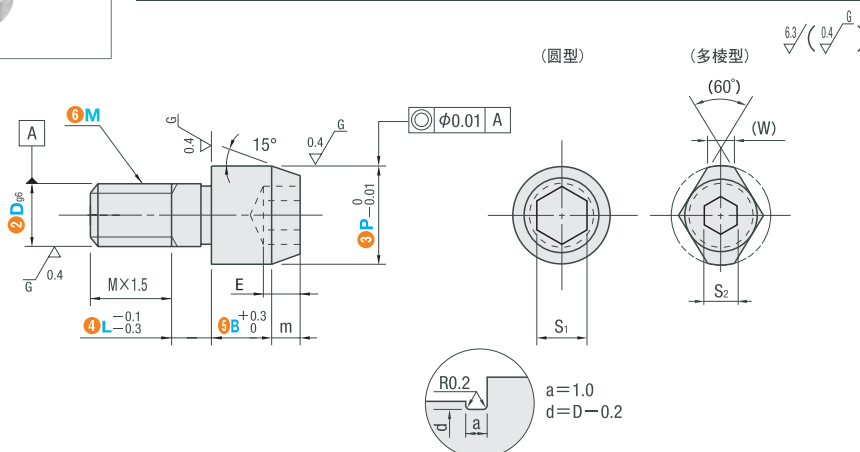

型号		③P 最小单位0.01mm		④L 最小单位1mm	⑤B 最小单位0.1mm	⑥M (粗牙螺纹)	m	(W)	S ₁	S ₂	F	
① 代码	②D	圆型	多棱型									
<圆型> DAFNSA DAGFNSA DACFNSA DASFNSA	<多棱型> DAFNSD DAGFNSD DASFNSD ① 适用于D≥6	3	6.00~ 6.50	—	2~ 6	3.5~10.0	3	2	—	3	—	2
		4	6.50~ 7.00	—	2~ 8	2.5~10.0	3 4	3	—	3	—	2
		5	6.50~ 8.00	—	3~10	2.5~10.0	3 4 5	3	—	3	—	2
		6	6.50~10.00	8.00~10.00	3~10	2.5~12.0	4 5 6	3	3	3	3	2
		8	9.00~13.00	10.00~13.00	5~10	3.0~15.0	4 5 6 8	4	3.5	4	4	2.5
		10	11.00~15.00	12.00~15.00	5~15	4.5~20.0	5 6 8 10	4	4	5	5	3
		12	13.00~18.00	13.00~18.00	8~15	6.0~20.0	6 8 10 12	4	5	6	6	4
		16	17.00~25.00	17.00~25.00	8~20	8.0~20.0	8 10 12 16	5	7	8	8	5
		20	22.00~30.00	22.00~30.00	10~20	8.0~20.0	10 12 16 20	5	9	8	8	5

①未指定M尺寸时，以D=M进行制作。



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRO仕瑞达