



弹簧/缓冲器/氮气弹簧

拉伸弹簧用支柱

缺口孔型·内六角孔型·六角型



型号(①代码·②D/M/B)

LBAIOK8
LBSAIO6

③L
— 40
20

■请按步骤①~③选择型号和参数后进行订购。



型号区分:

代码


5 天发货

■缺口孔型



■使用时可将拉伸弹簧的挂钩勾在支柱的孔或槽中。

LBAIOK
LBSAIOK (不锈钢)

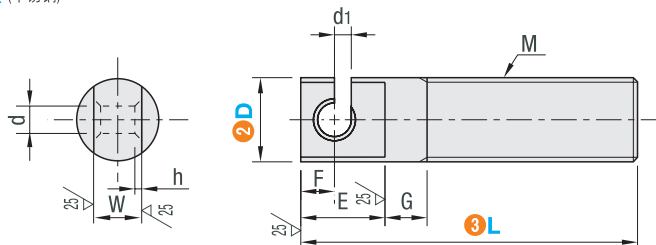

代码	材质	表面处理	附件·材质
LBAIOK	S45C	发黑	1个螺帽 SWCH(JIS1种)
LBSAIOK	SUS304	—	1个螺帽 SUS304(JIS1种)

▽/(25 /)


型号		③L				M (粗牙螺纹)	d	d1	W	G	E	F	h	使用最大负载N	
① 代码	② D													LBAIOK	LBSAIOK
缺口孔型 LBAIOK LBSAIOK	4	15	20	25	30	M4	1.5	1	2.5	5	3.5	1.75	0.3	80	50
	5	15	20	25	30	M5	2	1	3	5	4	2	0.4	115	72
	6		20	25	30	M6	2	1	3.5	5	5	2.5	0.5	179	113
	8			25	30	M8	3	1.5	5	5	7	3.5	1	300	189

kgf = N × 0.101972

■内六角孔型



LBARO
LBSARO (不锈钢)

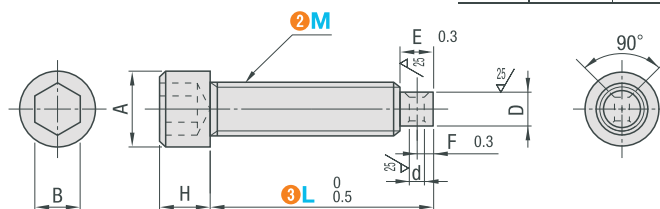

代码	材质	表面处理	附件·材质
LBARO	SCM435	发黑	1个螺帽 SWCH(JIS3种)
LBSARO	SUS304	—	1个螺帽 SUS304(JIS3种)


▽/(25 /)

型号		③L				d	D	E	F	A	B	H
① 代码	② M											
内六角孔型 LBAR LBSAR	4	15	20	25	30	1.5	3.0	3	1.5	7	3	4
	5	15	20	25	30	2	3.8	4	2	8.5	4	5
	6		20	25	30	2	4.5	4	2	10	5	6
	8		20	25	30	3	6.1	7	3.5	13	6	8

■六角型



LBDSO
LBPDOS

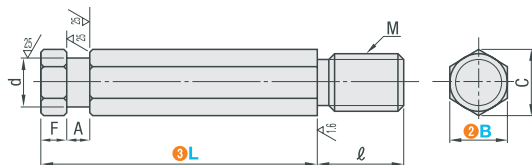

代码	材质	表面处理
LBDSO	SUM22	发黑
LBPDOS	SUM22	无电解镀锌

▽/(25 / 1.5 /)

型号		③L				M (粗牙螺纹)	(C)	ℓ	A	F	d
① 代码	② B										
六角型 LBDSO LBPDOS	3	10	15			M3	3.5	6	1	3	1.8
	4	10	15	20		M4	4.6	8	1.2	3	2
	5	10	15	20		M5	5.8	10	2	3	3
	6		20	25		M6	6.9	12	3	4	3.6
	8		20	25	30	M8	9.2	16	3	4	5

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613