



直线导轨

微型直线导轨 宽幅型 带定位孔标准滑块型




型号(①代码·②H) — ③L
AGWPN12 — 200

■ 请按步骤①~③选择型号和参数后进行订购。





型号区分: 7 天发货

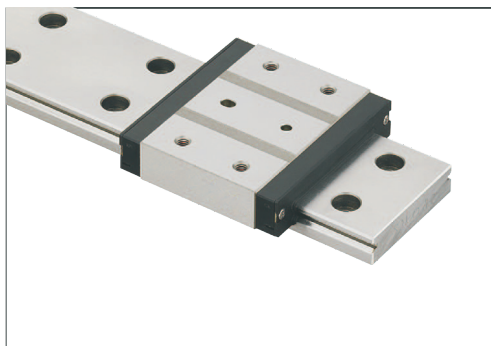


耐热温度: -20~80℃


材质 硬度	代码	滑块数量
	微预压型	
	精密级	
不锈钢 56HRC~	AGWPN	1
	AGW2PN	2

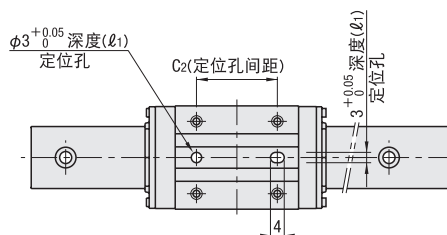

H9 · 12 · 14



H16

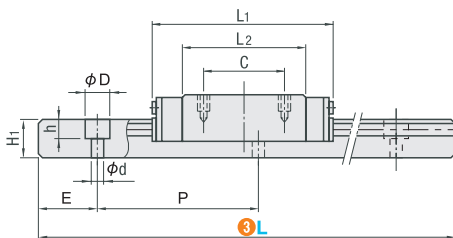


型号		②H	③L	滑块尺寸							定位孔尺寸			导轨尺寸					
① 代码				W	L ₁	B	C	S×ℓ	L ₂	K	N	C ₂	(ℓ ₁)	W ₁	W ₂	H ₁	沉孔 d×D×h	P	E
(单滑块) AGWPN	(双滑块) AGW2PN	9	50~290	25	31.5	19	10	M3×3	22	1.7	12.5	12	2.5	14	5.5	5.5	3.5×6×3.2	30	最小单位1mm. (E尺寸为两端均分)
		12	50~290	30	39	21	12	M3×3	28.6	2.5	15	12	2.5	18	6	7	3.5×6×4.5	30	
		14	70~470	40	44	28	15	M3×3.5	31	3.2	20	15	3.5	24	8	8	4.5×8×4.5	40	
		16	70~670	60	55	45	20	M4×4.5	40	13	30	20	4	42	9	9.5	4.5×8×4.5	40	

国际单位1N=0.102kgf


H	基本额定负载		静态容许力矩			重量	
	C(动) kN	Co(静) kN	MA N·m	MB N·m	MC N·m	滑块 kg	导轨 kg/m
9	1.35	2.1	7.7	7.7	15.4	0.02	0.50
12	2.1	3.5	13	16	30	0.04	0.96
14	3.2	5.2	20	21.5	51	0.08	1.40
16	5.5	8.2	40	41	142	0.15	2.95

■ 预压与精度基准



单位: μm

规格	微预压型 精密级	普通间隙型 普通级
高度H的尺寸公差	±20	±20
宽度W2的尺寸公差	±25	±25
成对高度H公差	±15	±40
成对高度W2公差	±20	±40



询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613