




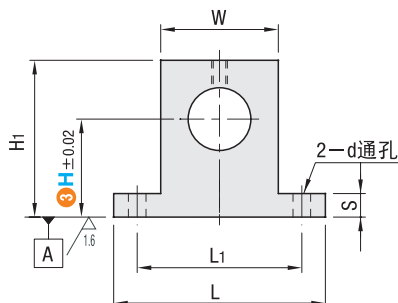

导向轴支座

T型止动螺丝 标准型

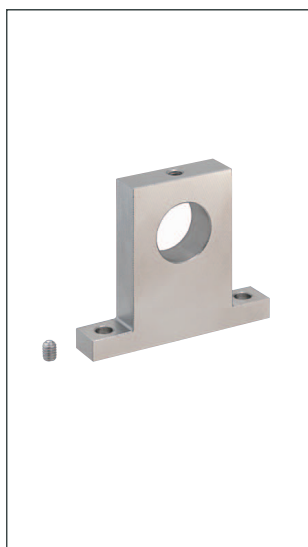

代码	材质	表面处理	附件
ABSTB	S45C	发黑	1个内六角止动螺丝
ABSTM		无电解镀锌	
ABSTS	SUS304	—	1个内六角止动螺丝(SUS)
ABSTA	铝合金	本色阳极氧化处理	



1 代码 2 D 3 H
ABSTB8 — 25

■ 请按步骤①~③选择型号和参数后进行订购。



型号区分: 7 天发货

型号		高度选择	L	H ₁	T	S	W	L ₁	d	止动螺丝
① 代码	② D	③ H								M
ABSTB ABSTM ABSTS ABSTA	3	10 15 20	26	H+5	8	4	10	18	3.5	M3
	4	10 15 20	26	H+6	8	4	10	18	3.5	
	5	15 20 25	26	H+7	8	4	10	18	3.5	
	6	15 20 25	26	H+8	8	4	10	18	3.5	
	8	10 15 20 25 30 40	42	H+9	10	6	18	30	4.5	M4
	10	10 15 20 25 30 40	42	H+10	10	6	18	30	4.5	
	12	10 15 20 25 30 40	42	H+11	10	6	18	30	4.5	
	13	20 25 30	42	H+12	10	6	18	30	4.5	
	15	15 20 25 30 40	54	H+15	10	6	30	42	4.5	M6
	16	15 20 25 30 40	54	H+15	10	6	30	42	4.5	
	18	25 30 40 50 60	67	H+18	16	8	35	50	6.6	
	20	15 20 25 30 40 50 60	67	H+18	16	8	35	50	6.6	
	25	20 25 30 40 50 60	67	H+20	16	8	35	50	6.6	
	30	20 25 30 40 50 60	85	H+23	20	10	45	65	9	
	35	25 30 50 60	85	H+25	20	10	45	65	9	
	40	25 30 40 60 80	100	H+30	20	10	60	80	9	

