



型号(① 代码 · ② C) — ③ 弯曲半径 — ④ 链数 — ⑤ 接头 ■ 请按步骤①~⑤选择型号和参数后进行订购。

AHB15 — C20 — R38 — N15 — AHJ15B — C20




型号区分: 代码 5 天发货



拖链

代码	开口方向	横梁	材质	颜色	允许温度	阻燃等级	附件
AHB15	内径打开	半封闭式	工程塑料	黑色	-20℃ ~ 80℃	UL94-V0	接头

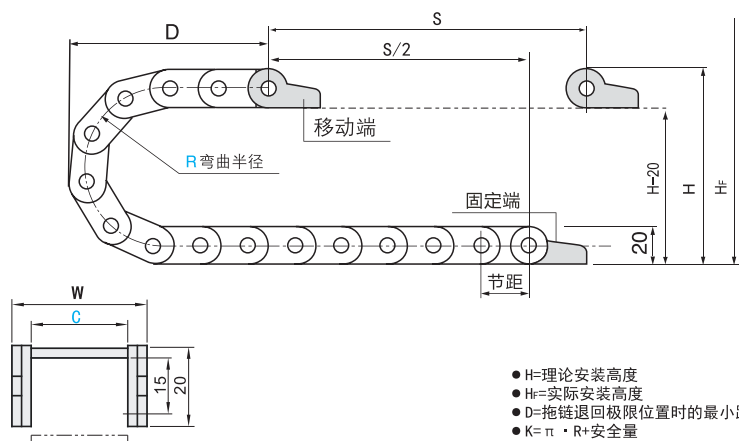

- H=理论安装高度
- Hf=实际安装高度
- D=拖链退回极限位置时的最小距离
- K=π · R+安全量



型号		弯曲半径R	链节数N	接头C	安装尺寸			所需安装高度Hf	外宽W	节距P	最大电缆直径	最大架空负载(kg/m)	最大架空长度(m)	重量						
代码	内宽C				H	D	K													
AHB15	15	28	1~	AHJ15B-C15	76	60	130	96	23	25	12	0.3	0.9	≈0.28						
	20	28		AHJ15B-C20	76	60	130	96	29	20				≈0.29						
		38			96	70	160	116												
	28	28		AHJ15B-C30	76	60	130	96	39					49	≈0.35					
		38			96	70	160	116												
	40	48		AHJ15B-C40	116	80	190	136							59	20	12	0.3	0.9	≈0.39
		28			76	60	130	96												
		38			96	70	160	116												
		48			116	80	190	136												
	50	28		AHJ15B-C50	76	60	130	96	59	20				12	0.3	0.9	≈0.42			
		48			116	80	190	136												

接头



代码	材质	颜色	允许温度	阻燃等级
AHJ15B	工程塑料	黑色	-20℃ ~ 80℃	UL94-V0





适用于: C = 15





适用于: C = 20



适用于: C = 30



适用于: C = 40/50



型号		A	A1	B	B1	C	d	d1	d2	d3
代码	内宽C									
AHJ15B	15	8	—	—	—	—	—	—	—	—
	20	—	—	30	27	7	3.2	6×90°	—	—
	30	—	15.6	39.5	37.3	3.1	4.2	8.6	7.7	12.1
	40	—	27	49.5	47.4	6.8	4.3	7	7.3	10
	50	7.5	37	59.6	57.3				7.9	10.6



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达