



定位销/夹具衬套

夹具衬套 带肩自由指定型
带肩·薄壁型



型号(1代码·2D) — 3P — 4L
DAHUFM25 — P15.61 — L20.0

■ 请按步骤1~4选择型号和参数后进行订购。




型号区分: 7 天发货

薄壁型



代码		材质	表面处理	硬度
D尺寸p6	D尺寸m6			
DAHUF	DAHUF	SKS3	—	淬火硬度56~60HRC
DAHUFBP	DAHUFB	SKS3	发黑	淬火硬度56~60HRC
DAHUFMP	DAHUFM	SKS3	无电解镀锌	淬火硬度56~60HRC
DAHUFCP	DAHUFC	SUS440C	—	淬火硬度50~55HRC

D	D公差	
	p6	m6
5	+0.020	+0.012
6	+0.012	+0.004
7		
8	+0.024	+0.015
9	+0.015	+0.006
10		
11		
12		
13	+0.029	+0.018
14	+0.018	+0.007
15		
17		
18		
19		
20		
21	+0.035	+0.021
22	+0.022	+0.008
25		
26		
30		
31	+0.042	+0.025
35	+0.026	+0.009

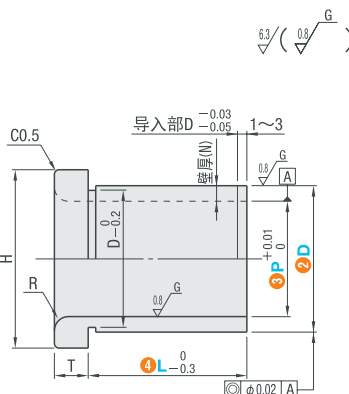

型号		3P	4L	壁厚(N)	R	H	T
1代码	2D	最小单位0.01mm	最小单位0.1mm				
(p6)	5	2.20~ 3.00	3.0~ 5.0	1.00~1.40	0.5以下	9	2.5
	6	3.00~ 4.00	3.0~ 5.5	1.00~1.50	0.5以下	9	2.5
	7	3.51~ 5.00	3.0~ 6.0	1.00~1.74	0.5	11	2.5
	8	4.51~ 6.00	3.0~10.0	1.00~1.74	0.5	12	3
	9	4.51~ 6.50	3.0~10.0	1.25~2.24	0.5	13.5	3
	10	6.51~ 8.00	3.0~15.0	1.00~1.74	0.5	14	3
	11	8.00~ 9.00	3.0~15.0	1.00~1.50	0.5	15	3
	12	8.51~ 9.00	3.0~15.0	1.50~1.74	0.5	16	4
	13	8.51~10.00	5.0~35.0	1.50~2.24	0.5	17	4
	14	9.00~11.00	5.0~35.0	1.50~2.50	0.5	18	4
	15	10.51~12.00	5.0~35.0	1.50~2.24	0.5	19	4
	17	10.51~13.00	5.0~35.0	2.00~3.24	1.0	21	5
	18	12.51~14.00	5.0~35.0	2.00~2.74	1.0	22	5
	19	12.51~14.00	5.0~35.0	2.50~3.25	1.0	24	5
	20	13.51~15.00	5.0~35.0	2.50~3.24	1.0	26	5
	21	13.51~15.00	5.0~35.0	3.00~3.75	1.0	26	5
	22	13.51~17.00	5.0~35.0	2.50~4.24	1.0	26	5
	25	15.51~19.00	5.0~35.0	3.00~4.74	1.0	30	5
	26	16.51~20.00	5.0~35.0	3.00~4.74	1.0	30	5
	30	20.51~24.00	5.0~35.0	3.00~4.74	1.5	35	6
(m6)	31	20.51~24.00	5.0~35.0	3.50~5.24	1.5	36	6
	35	25.01~29.00	5.0~50.0	3.00~4.99	1.5	40	6

①P≤3.59时, L+T≤P×2.5 P≥3.60时, L+T≤P×3.0



型号(1代码·2D) — 3P — 4L — (RC·TC)
DAHUFM25 — P15.61 — L20.0 — RC

可选加工	代码	技术说明
内径R	RC	在两侧进行内径R加工。 壁厚1.5mm以上适用 D10以上时R的大小与肩侧R相同。 [指定方法] RC
变更肩厚	TC	最小单位1mm [指定方法] TC4 3≤TC<T ①全长缩短T-TC的程度。 ②适用于D≥12

询价4种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613