

定位销 大头圆锥型

外螺纹型 · DP公差 · R选择型

定位销/夹具衬套



■ 请按步骤①~④选择型号和参数后进行订购。

型号(①代码 · ②D公差 · ③P公差 · ④D) — ⑤P — ⑥L — ⑦B — ⑧E — ⑨R

DAKPBAMG10

— P12.00 — L5 — B10.0 — E6.0 — R15



型号区分: 7天发货

代码


7天发货



代码	材质	表面处理	硬度
DAKPBNA	SKS3	—	淬火硬度60~63HRC
DAGKPBNA	SKS3	镀硬铬 厚度3 μm以上	淬火硬度50~55HRC 镀层硬度750HV~
DACKPBNA	SUS440C	—	淬火硬度50~55HRC
DASKPBNA	SUS304	—	—

■ 公差选择

D 或 P	② · ③ D · P公差				
	M	p6	G	H	S
3.00	+0.008 +0.002	+0.012 +0.006	-0.002 -0.008	0 -0.010	0 -0.01
3.01 6.00	+0.012 +0.004	+0.020 +0.012	-0.004 -0.012	0 -0.012	
6.01 10.00	+0.015 +0.006	+0.024 +0.015	-0.005 -0.014	0 -0.015	
10.01 18.00	+0.018 +0.007	+0.029 +0.018	-0.006 -0.017	0 -0.018	
18.01 30.00	+0.021 +0.008	+0.035 +0.022	-0.007 -0.021	0 -0.021	

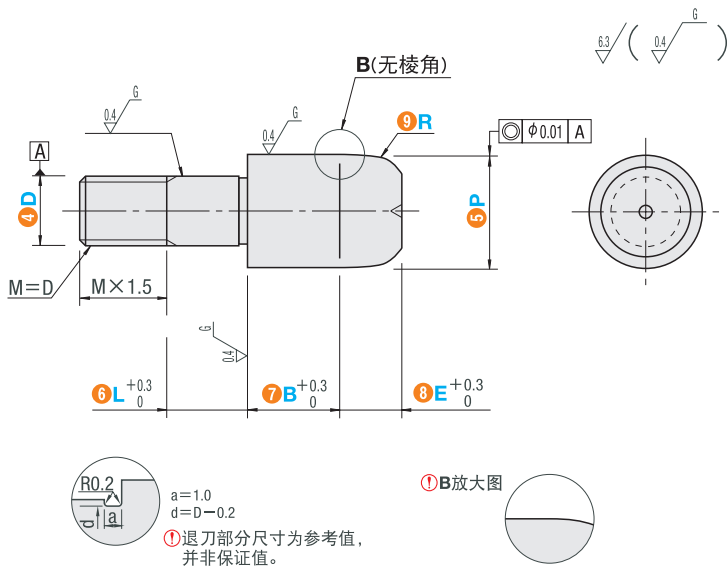

① 代码	型号			⑤ P 最小单位0.01mm	⑥ L 最小单位1mm	⑦ B 最小单位0.5mm	⑧ E 最小单位0.5mm	⑨ R 选择	M (粗牙螺纹)
	② D公差 选择	③ P公差 选择	④ D						
DAKPBNA DAGKPBNA DACKPBNA DASKPBNA	M P G H	M P G H S	3	3.50~ 6.00	2~ 6	2.0~10.0	1.0~20.0 ①最小单位的值取 决于P尺寸。 请确认“E尺寸 · R尺寸详细 指定范围”表。	5 10 15 20 25 30 35 40	M3
			4	4.50~ 7.00	2~ 8	2.0~10.0			M4
			5	5.50~ 8.00	3~10	2.0~10.0			M5
			6	6.50~10.00	3~10	3.0~12.0			M6
			8	9.00~13.00	5~10	3.0~14.0			M8
			10	11.00~15.00	5~15	3.0~16.0			M10
			12	13.00~18.00	8~15	3.0~18.0			M12
			16	17.00~25.00	8~20	3.0~20.0			M16
			20	22.00~30.00	10~20	3.0~20.0			M20

■ E尺寸 · R尺寸详细最小单位范围

P 最小单位0.01mm	E 最小单位0.5mm	R选择
2.00~ 4.00	1.0~ 2.0	5 10
4.01~ 8.00	2.5~ 4.0	10 15
8.01~12.00	4.5~ 7.0	10 15 20
12.01~16.00	5.0~10.0	15 20 25
16.01~20.00	5.0~15.0	20 25 30
20.01~25.00	5.0~15.0	25 30 35
25.01~30.00	5.0~20.0	30 35 40

定位销
夹具衬套

20



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD 仕瑞达