



定位导向零件

调整螺栓



型号 (1) 代码 · (2) M — (3) L
DBJKTN10 — 80

■ 请按步骤 ①~③ 选择型号和参数后进行订购。




型号区分: 7 天发货
代码

■ 调整螺栓 — 内六角压纹旋钮型 —




螺纹	代码	材质	表面处理
粗牙螺纹	DBJKTN	S45C	发黑
	DBJKTNM		无电解镀锌
	DBJKTNS	SUS304	—
细牙螺纹	DBJKTNF	S45C	发黑
	DBJKTNMF		无电解镀锌

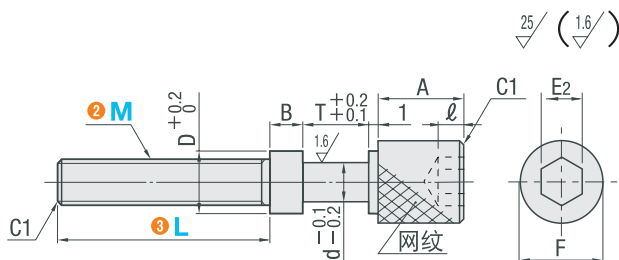


型号		③ L	d	T	M×螺距		B	D	A	F	E2	ℓ	粗牙螺纹			细牙螺纹	
① 代码	② M	最小单位5mm			细牙螺纹	粗牙螺纹							DBJKTN	DBJKTNM	DBJKTNS	DBJKTNF	DBJKTNMF
(粗牙螺纹)	3	10~45	2.5	7	—	3×0.5	3	4.5	7	10	5	4	●	●	—	—	—
DBJKTN	4	10~60	3.5	—	4×0.5	4×0.7	—	5.5	—	—	—	—	●	●	—	●	●
DBJKTNM	5	10~70	4.5	9	5×0.5	5×0.8	4.6	7.5	—	—	—	—	●	●	●	●	●
DBJKTNS	6	15~80	5.5	—	6×0.75	6×1.0	—	8.5	15	15	8	7	●	●	—	●	●
(细牙螺纹)	8	20~80	7.5	12	8×0.75	8×1.25	6	11.5	—	—	—	—	●	●	—	●	●
DBJKTNF	10	25~80	9.5	16	10×1.0	10×1.5	7	15.5	25	20	10	9	●	●	—	●	●
DBJKTNMF	12	25~80	11.5	—	12×1.0	12×1.75	—	17.5	—	—	—	—	●	●	—	●	●
	16	25~80	15.5	19	—	16×2.0	8	21.5	—	24	—	—	●	●	—	—	—

■ 调整螺栓 — 内六角孔型 —



螺纹	代码	材质	表面处理
粗牙螺纹	DBJSTR	S45C	发黑
	DBJSTMR		无电解镀锌
	DBJSTR	SUS304	—

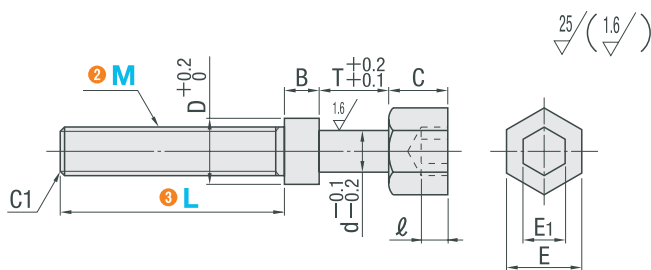

型号		③ L	d	T	M×螺距		B	D	C	E	E1	ℓ
① 代码	② M	最小单位 5mm			粗牙螺纹	细牙螺纹						
DBJSTR	4	10~50	3.5	7	4×0.7	—	3	5.5	5	7	2.5	2.5
DBJSTMR	5	10~50	4.5	—	5×0.8	—	—	7.5	—	8	3	3
DBJSTR	6	15~50	5.5	9	6×1.0	—	4.6	8.5	10	10	4	4

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613