





■ 螺帽固定型



D公差 (g6)	
6	-0.004 -0.012
8~10	-0.005 -0.014
12~18	-0.006 -0.017
20~30	-0.007 -0.020

代码	材质	表面处理
圆型		
BDFFC	S45C	发黑
BDPFC	S45C	无电解镀锌
BDSFC	SUS304	—

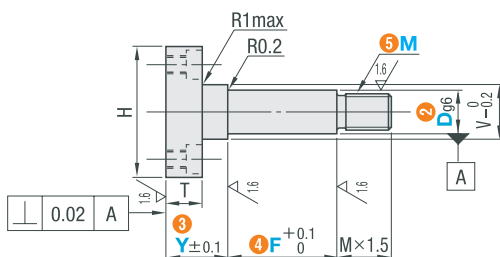

① 有关外螺纹的退刀槽尺寸请参阅别表(下表)。



型号(①代码·②D) — ③Y — ④F — ⑤T — ⑥MA
BDFMB20 — 20 — F70 — T5 — MA6
BDSFMB12 — 10 — F100 — T2 — MA6

■ 请按步骤①~⑥选择
型号和参数后进行订购。





型号区分: 代码 7 天发货


型号 ① 代码	2D	最小单位1mm ③Y	④F	⑤M(粗牙螺纹) 选择	V	H	T	m1	d1	h	P.C.D.
圆型 BDFFC BDPFC BDSFC	6	12~60	5~100	4 5 6	8	26	10	M4	6.5	3.5	17
	8			5 6 8	10	28					19
	10			6 8 10	13	32					23



型号(①代码·②D) — ③Y — ④F — ⑤M(MSC) — (YKC·APC·etc.)
BDPFC10 — 20 — F40 — MSC10 — APC

可选加工	挡圈组件																
		将外螺纹变更为细牙螺纹															
代码	SET	APC	MSC														
技术说明	附带符合轴径的挡圈。		将螺帽固定型的外螺纹部M变更为下表所示的细牙螺纹。														
	指定方法 SET		① 仅螺帽固定型适用														
	① 仅适用于挡圈型		① 指定时请将M变更为MSC。														
	挡圈形状		指定方法 MSC8														
	No.3~8(D=3~8): E型挡圈 No.10~30(D=10~30): C型挡圈		<table><tr><th>MSC</th><th>螺距</th></tr><tr><td>M6</td><td>0.75</td></tr><tr><td>M 8~20</td><td>1</td></tr><tr><td>M25~30</td><td>1.5</td></tr></table>	MSC	螺距	M6	0.75	M 8~20	1	M25~30	1.5						
MSC	螺距																
M6	0.75																
M 8~20	1																
M25~30	1.5																
技术说明	挡圈材质																
	<table><tr><th colspan="2">悬臂销</th><th>挡圈</th></tr><tr><th>材质</th><th>表面处理</th><th>材质</th></tr><tr><td rowspan="2">S45C</td><td>发黑</td><td>弹簧钢</td></tr><tr><td>无电解镀锌</td><td></td></tr><tr><td>SUS304</td><td>—</td><td>SUS304-CSP</td></tr></table>		悬臂销		挡圈	材质	表面处理	材质	S45C	发黑	弹簧钢	无电解镀锌		SUS304	—	SUS304-CSP	
	悬臂销		挡圈														
	材质	表面处理	材质														
	S45C	发黑	弹簧钢														
无电解镀锌																	
SUS304	—	SUS304-CSP															

① 外螺纹退刀槽加工尺寸



粗牙螺纹				细牙螺纹			
螺纹直径 (M)	g	r	f	螺纹直径 (MSC)	g	r	f
4	1.2~1.5	0.2~0.3	2.9~3.2	4	1.2~1.5	0.2~0.3	2.9~3.2
5			3.9~4.1	5			3.9~4.1
6			4.3~4.9	6			4.3~4.9
8	1.5~2.5	0.2~0.6	6.3~6.6	8	1.5~2.5	0.2~0.6	6.3~6.6
10			8.1~8.3	10			8.3~8.6
12	1.5~3.0	0.2~1.0	9.8~10.1	12	1.5~3.0	0.2~1.0	9.8~10.7
16			13.6~13.8	15			13.6~13.8
20	1.5~4.0		17.0~17.2	20	1.5~4.0		17.2~18.8
24			20.2~20.7	25			20.2~23.2
30	2.5~5.0	0.2~1.5	26.0~26.2	30	2.5~5.0	0.2~1.5	26.2~28.2

