



小零件/磁铁

C型挡圈（轴用）/E型挡圈



型号(①代码·②No.)
EASWS6

■ 请按步骤①~②选择型号和参数后进行订购。





型号区分:
代码 5 天发货

小零件·磁铁

30

■ C型挡圈(轴用)

EASWN
EASWS (不锈钢)



适用轴

代码	材质	硬度
EASWN	弹簧钢	44~53HRC
EASWS	SUS304-CSP	36~44HRC


型号		挡圈							参考	适用轴(参考)					
代码	No.	d3	公差	t	公差	b (约)	a (约)	d0 (最小)	d4	d1	d2	公差	m	公差	n (最小)
EASWN	3	2.7	+0.04	0.25	±0.025	0.5	1.7	0.7	7	3	2.85	0	0.35	0	0.3
	4	3.7	-0.15	0.4	±0.03	0.9	2.2	0.8	9	4	3.8	-0.04	0.5	0	0.3
	5	4.7		0.6		1.1	2.4		10.5	5	4.8		0.7	+0.10	0.5
	6	5.6		0.7		1.3	2.8		12	6	5.7		0.8		0.5
	7	6.5		0.8	±0.04	1.4	3	1	14	7	6.7	0	0.9		0.6
	8	7.4	-0.2	0.8		1.6	3		15	8	7.6	-0.06			0.6
	4	3.6		0.25	±0.03	0.7	1.4		9	4	3.7		0.3		1.0
	5	4.5		0.4		0.7	1.4	0.7	10.5	5	4.7		0.45	+0.10	1.5
EASWS (不锈钢)	6	5.5	±0.1		±0.04	0.8	2		12	6	5.7	±0.06			
	7	6.3				0.9	2		14	7	6.5		0.7		
	8	7.1		0.65		1	2.2	1	15	8	7.4				
	10	9.3	±0.15			1.8	3	1.2	17	10	9.6	-0.09			
	11	10.2				2	3.1		18	11	10.5				
	12	11.1				2.1	3.2	1.5	19	12	11.5				
	13	12			±0.05	3.3			20	13	12.4				
	14	12.9	±0.18			3.4			22	14	13.4	0	1.15		
EASWN	15	13.8				3.5			23	15	14.3	-0.1			
	16	14.7				3.6		1.7	24	16	15.2				
	17	15.7				3.7			25	17	16.2				
	18	16.5				3.8			26	18	17				
	19	17.5				3.8			27	19	18				
	20	18.5				3.9			28	20	19				
	21	19.5				4			30	21		2.0			1.5
	22	20.5				4.1			31	22	21				
	23	21.4				4.5			32.5	23	22				
	24	22.2	±0.2		±0.06	4.2		2	33	24	22.9	0	1.35	+0.14	
	25	23.2				4.3			34	25	23.9	-0.2			
	26	24.2				4.4			35	26	24.9				
	28	25.9				4.6			38	28	26.6				
	29	26.9				4.7			39	29	27.6				
	30	27.9				4.8			40	30	28.6				
	32	29.6				5			43	32	30.3				
	35	32.2	±0.25			4	5.4		46	35	33				
	40	37				4.5	5.8		53	40	38	0	1.9		
	45	41.5	±0.4		±0.07	4.8	6.3	2.5	58	45	42.5	-0.25			
	50	45.8				5	6.7		64	50	47				2
	52	47.8				5	6.8		66	52	49				
	60	55.8	±0.45			5.5	7.2		75	60	57	0	2.2		
	80	74.5		2.5	±0.08	7.4	8.2		97	80	76.5	-0.3	2.7		2.5

■ E型挡圈

EANTW
EANTWS (不锈钢)



代码	材质	硬度	表面处理
EANTW	弹簧钢	44~53HRC	铬酸盐光泽处理
EANTWS	SUS304-CSP	37~46HRC	-

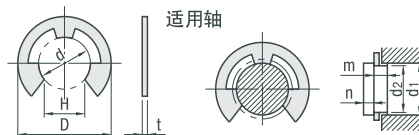

型号		挡圈								适用轴(参考)					
代码	No.	d	公差	D	公差	H	公差	t	公差	d1的分类 大于以下	d2	公差	m	公差	n (最小)
EANTW EANTWS (不锈钢)	1.2	1.2		3	±0.1	1		0.3	±0.025	1.4	2	1.2	0.4		0.6
	1.5	1.5		4		1.3				2	2.5	1.5			0.8
	2	2	0	5		1.7	0	0.4	±0.03	2.5	3.2	2	0.5	+0.05	
	2.5	2.5	-0.09	6		2.1	-0.25			3.2	4	2.5		0	
	3	3		7		2.6				4	5	3			1
	4	4		9	±0.2	3.5		0.6		5	7	4			
	5	5	0	11		4.3	0			6	8	5	0.7	+0.075	1.2
	6	6	-0.12	12		5.2	-0.30		±0.04	7	9	6		0	
	7	7		14		6.1		0.8		8	11	7			1.5
	8	8	0	16		6.9	0			9	12	8		+0.09	1.8
	9	9	-0.15	18		7.8	-0.35			10	14	9		0	2

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613