



型号(1代码·2D)

DAFQSA4
DAGFQSA8

— **3P** — **4L** — **5B**

— P2.01 — L6 — B5.5
— P5.50 — L10 — B5.0

■ 请按步骤①~⑤选择型号和参数后进行订购。



型号区分:


代码 7 天发货



代 码				材 质	表 面 处 理	硬 度
圆 型		多 棱 型				
D尺寸m6	D尺寸p6	D尺寸m6	D尺寸p6			
DAFQSA	DAFQSPA	DAFQSD	DAFQSPD	SKS3	—	淬火硬度60～63HRC
DAGFQSA	DAGFQSPA	DAGFQSD	DAGFQSPD	SKS3	镀硬铬 厚度3 μm以上	淬火硬度50～55HRC 镀层硬度 750HV—
DACFQSA	DACFQSPA	DACFQSD	DACFQSPD	SUS440C	—	淬火硬度50～55HRC
DASFQSA	DASFQSPA	—	—	SUS304	—	—

■D尺寸公差

D	m6	p6
2	+0.008	+0.012
3	+0.002	+0.006
4		
5	+0.012	+0.020
6	+0.004	+0.012
8		
10	+0.015	+0.024
12	+0.006	+0.015
13	+0.018	+0.029
16	+0.007	+0.018
20	+0.021	+0.035
	+0.008	+0.022

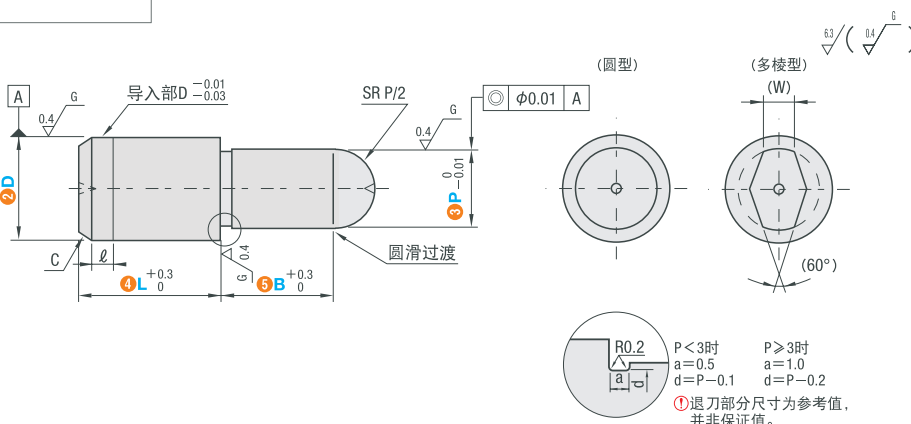

型号			③P	④L	⑤B	ℓ	C	(W)	
① 代码	②D	最小单位 0.01mm	最小单位 1mm	最小单位 0.1mm					
<圆型>	<m6>	<p6>	2	1.00~2.00	2~5	2.0~10.0	0	0.3	—
			3	1.00~3.00	3~10	2.0~10.0	1	0.5	—
			4	1.50 (2.00) ~4.00	4~10	2.0~10.0	1	1	1
	DAFQSA	DAFQSPA	5	2.00~5.00	5~10	2.0~15.0 (10.0)	1	1	1.2
	DAFGQSA	DAFGQSPA	6	2.00~6.00	5~17	2.0~15.0	1	1	1.5
	DACFQSA	DACFQSPA							
	DASFQSA	DASFQSPA							
<多棱型>			8	3.00~8.00	8~21	2.0~20.0 (15.0)	2	1.5	1.8
			10	3.00~10.00	10~23	3.0~20.0	2	2	2.2
			12	5.00~12.00	12~24	3.0~30.0 (25.0)	2	2	2.5
	DAFQSD	DAFQSPD	13	6.00~13.00	13~26	5.0~30.0 (25.0)	2	2	3
	DAFGQSD	DAFGQSPD							
	DACFQSD	DACFQSPD	16	10.00~16.00	16~32	5.0~30.0	2	3	4
			20	13.00~20.00	20~40	5.0~30.0	2	3	5

①P·B()尺寸适用于多棱型。



传真: 0755-8957-5523

SRD仕瑞达

定位销
夹具衬套

20