



悬臂销

螺栓安装·内螺纹型




■ 请按步骤①~⑤选择型号和参数后进行订购。




代码	材质	表面处理
BDFHB	S45C	发黑
BDPFHB		无电解镀锌
BDSFHB	SUS304	—
BDPHFHB	SCM435 硬度35~40HRC	无电解镀锌

6.3 / (1.6 /)

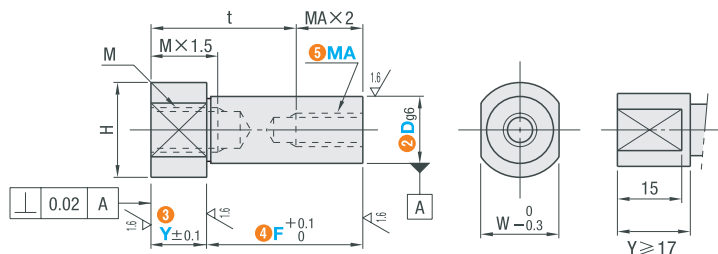

型号	②Dge		最小单位 1mm		⑤MA(粗牙螺纹) 选择	M (粗牙螺纹)	H	W			
① 代码			③Y	④F							
BDFHB BDPFHB BDSFHB BDPHFHB	6	—0.004 —0.012	2~60	5~100	3			M3	10	8	
	8	—0.005 —0.014			4			M4	12	10	
	10				4	5	6	M6	15	13	
	12	—0.006 —0.017	10~100	5			6	8	M8	17	14
	15			6			8	10	M10	20	17
	20			—0.007 —0.020	4~60	6			8	10	12

代码	材质	表面处理
BDFJB	S45C	发黑
BDPFJB		无电解镀锌
BDSFJB	SUS304	—

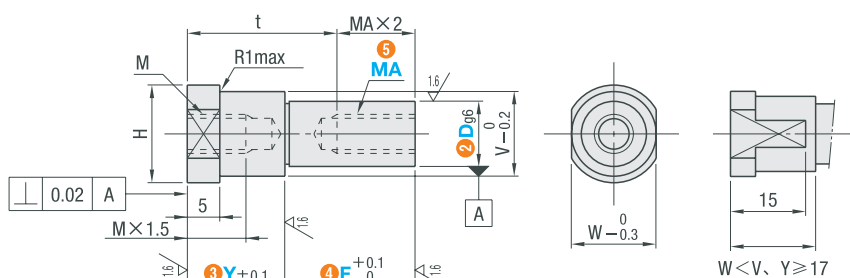 $\frac{6.3}{\nabla} \left(\frac{1.6}{\nabla} \right)$ 

型号		最小单位 1mm		5MA (粗牙螺纹) 选择	M (粗牙螺纹)	V	H	W	
1 代码	2Dg6								3Y
BDFJB BDPFJB BDSFJB	6	—0.004 —0.012	7~60	5~100	3	M3	8	10	8
	8	—0.005 —0.014			4	M4	10	12	10
	10				4 5 6	M6	13	15	13
	12	—0.006 —0.017		10~100	5 6 8	M8	15	17	14
	15				6 8 10	M10	18	20	17
	20	—0.007 —0.020			6 8 10 12	M12	24	26	24