



定位销/夹具衬套

定位销 大头平头型

标准型/P尺寸固定型



型号(①代码·②D) — ③P
DAJDA8 — 12
DASJDA10 — 14

■请按步骤①~③选择 型号和参数后进行订购。



型号区分: ④代码 7 天发货

定位销
夹具衬套

20




代码		材质	表面处理	硬度
D尺寸m6	D尺寸p6			
DAJDA	DAJDPA	SKS3	—	淬火硬度60~63HRC
DAGJDA	DAGJDPA	SKS3	镀硬铬 厚度3μm以上	淬火硬度50~55HRC 镀层硬度 750HV~
DACJDA	DACJDPA	SUS440C	—	淬火硬度50~55HRC
DASJDA	DASJDPA	SUS304	—	—

■D尺寸公差表

D	m6	p6
1	+0.008	+0.012
2	+0.002	+0.006
3		
4	+0.012	+0.020
5	+0.004	+0.012
6		
8	+0.015	+0.024
10	+0.006	+0.015
12	+0.018	+0.029
13	+0.007	+0.018

■P尺寸公差表

P	h6
2·3	0 -0.006
5·6	0 -0.008
8·10	0 -0.009
12·14	0
16·18	-0.011

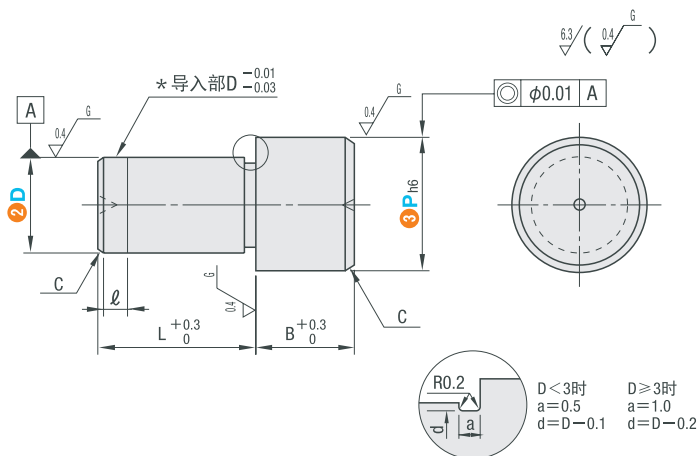

型号		③P选择	L	B	l	C
①代码	②D					
<m6>	1	2	3	2	0	0.1
	2	3	4	2	0	0.5
	3	5	5	3	1	1
	4	6·8	5	3	1	1
	5	8	8	4	1	1
	6	8·10	10	5	1	1
	8	12	12	6	2	1.5
	10	12·14	16	10	2	2
	12	16	20	20	2	2
	13	18	22	22	2	2
<p6>						
DAJDA	DAJDPA					
DAGJDA	DAGJDPA					
DACJDA	DACJDPA					
DASJDA	DASJDPA					

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613