

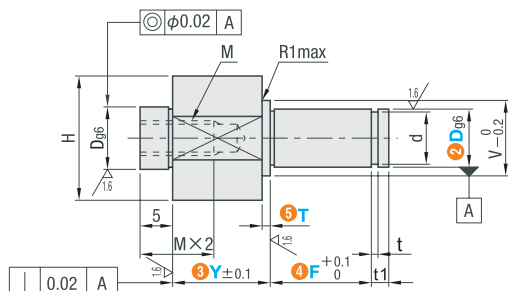




悬臂销

重载型


$$\frac{6.3}{\nabla} \left(\frac{1.6}{\nabla} \right)$$


型号(1代码·2D)	3Y	4F	5T
BDFMA20	20	F70	T5
BDSEMA12	10	F100	T2

■ 请按步骤①~⑤选择型号和参数后进行订购。



型号区分: **7** 天发货

型号	②Dg6		最小单位1mm		选择	M 粗牙 螺纹	V	H	W	d		t	t1
① 代码			③Y	④F	⑤T					基准尺寸	公差		
BDFMA BDPFMA BDSFMA	6	－0.004 －0.012	4～60	5～75	1 3 5	M3	8	14	12	5	+0.075 0	0.7	2
	8	－0.005 －0.014				M4	10	17	14	7	+0.090 0	0.9	3
	10			M6	13	21	18	9.6	0 －0.090	1.15	4		
	12	－0.006 －0.017		M8	15	24	21	11.5	0 －0.110				
	15		18		28	25	14.3						
	20	－0.007 －0.020	10～100		2 5 8	24	36	32	19	0 －0.120	1.35	5	
	25					29	43	38	23.9				
	30			34		50	44	28.6	1.65				



型号 (1 代码 · 2 D) — (3 Y) — (4 F) — (5 T) — (SET)
BDPFA15 — 20 — F60 — T8 — SET

可选加工 代码	挡圈组件 SET
技术说明	附带符合轴径的挡圈。 指定方法 SET 挡圈形状 No.6・8(D=6・8): E型挡圈 No.10~30(D=10~30): C型挡圈 挡圈材质
	悬臂销
	表面处理
	无电解镀锌
	—

螺纹规格	有效长度	底孔深度
M3	6	11
M4	8	14
M5	10	17
M6	12	20
M8	12	25