

浮动接头 简易连接型

【内螺纹】气缸连接件·固定座组件/钣金固定组件

气缸/相关配件



型号 (1) 代码 · (2) M—螺距
FCJRHA5 — 0.8

■ 请按步骤 ① ~ ② 选择 型号和参数后进行订购。






型号区分: 7 天发货

■ 浮动接头



代码	固定座代码	材质	表面处理	表面硬度
FCJRHA	FCLRA	S45C	镀硬铬	50HRC~



型号		气缸连接件								固定座									
代码	M—螺距	T	D	L	h	B	C	D1	A	T1	h1	W	H	a	P	d	d1	H1	Lu
FCJRHA	3—0.5	4	6	5	3	8	9.2	6.5	12	8	4	34	13	5	24	4.5	8	4.4	13
	4—0.7	4	7	6	3	10	11.5	8	14	8	4	36	15	6	26	4.5	8	4.4	14
	5—0.8	6	8	7	3	12	13.9	9	17	10	4	42	18	7	30	5.5	9.5	5.4	17
	6—1.0	6	10	8	4	14	16.2	11	19	11	5	44	20	8	32	5.5	9.5	5.4	19
	8—1.25	8	13	9	4	17	19.6	14	23	13	5	52	24	10	38	6.6	11	6.5	22
	10—1.25	8	16	11	4	21	24.2	18	28	13	5	56	30	12	42	6.6	11	6.5	24
	14—1.5	12	21	13	4	26	30	23	34	17	5	70	36	15	52	9	14	8.6	30
	18—1.5	15	25	15	5	30	34.6	27	38	21	6	84	43	19	62	11	17	10.5	36

气缸·相关配件

43



■ 钣金固定组件

标准加工品




代码	材质		表面处理	表面硬度
	浮动接头	固定座		
FCHSC	S45C	SPCC	镀硬铬	50HRC~

■ 接头



■ 附属固定板

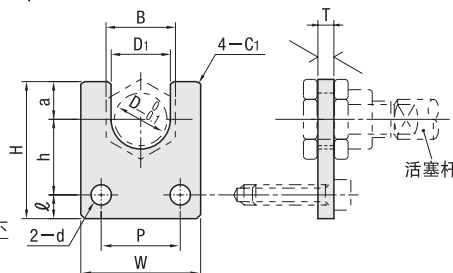

型号		T		h	D	B	(C)	附属固定板											
代码	M—螺距							T	公差	B	D ₁	W	H	a	h	ℓ	P	d	最大使用 拉伸压缩力(N)
FCHSC	3—0.5	2.3	+0.3	2	6	8	9.2	2.3	±0.19	8	6.5	16	25	5	14	6	8	4.5	19
	+0.25		7		10	11.5	10			8	19	26	6	10			54		
	5—0.8	3.2	+0.35	3	8	12	13.9	3.2	±0.23	12	9	22	33	7	18	8	12	123	
	6—1.0		+0.3		10	14	16.2			14	11	25	34	8			14	123	

① 国际单位1N=0.102kgf



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRO仕瑞达