

定位销 带肩型

内螺纹型・P・L・B尺寸指定型

定位销/夹具衬套



定位销
夹具衬套

20



型号(1代码・2No.)
DAFUD12

— 3P — 4L — 5B
— P11.97 — L12 — B5.5

■ 请按步骤1~5选择型号和参数后进行订购。



型号区分:
代码 7 天发货



代码		材质	表面处理	硬度
圆型	多棱型			
DAFUA	DAFUD	SKS3	—	淬火硬度60~63HRC
DAGFUA	DAGFUD	SKS3	镀硬铬 厚度3μm以上	淬火硬度50~55HRC 镀层硬度750HV~
DASFUA	DASFUD	SUS304	—	—




6.3 / (0.4 G)

■ D尺寸公差

No.	D尺寸	m6
6	6	-0.004 -0.012
8・8T	8	-0.005 -0.014
10・10T	10	-0.005 -0.014
12・12T	12	-0.006 -0.017
13・13T	13	-0.006 -0.017
16・16T	16	-0.007 -0.020
20・20T	20	-0.007 -0.020

■ 内螺纹底孔表

螺纹直径	M3	M4	M5	M6	M8
底孔直径d ₂	2.6	3.4	4.3	5.1	6.9
底孔深度U	9.5	12	14.5	17	21

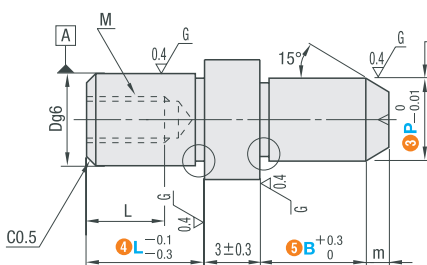

型号		最小单位0.01mm	4L最小单位1mm		最小单位0.1mm	M (粗牙螺纹)	ℓ	D	m	H	(W)
1 代码	2 No.		圆型	多棱型							
<圆型> DAFUA DAGFUA DASFUA	6	4.00~7.00	6~12	9~12	2.0~15.0	M3	5	6	2	8	1.8
	8	5.00~9.00	8~16	12~16	2.0~15.0	M5	8	8	3	11	2.2
	8T					M4	6	8	3	11	2.2
	10	7.00~12.00	10~20	12~20	2.0~30.0	M5	8	10	3	13	3
	10T		8~16	12~16	2.0~30.0	M4	6	10	3	13	3
	12	7.00~12.00	12~24	12~24	3.0~30.0	M5	8	12	3	15	3.2
	12T		8~18	12~18	3.0~30.0	M4	6	12	3	15	3.2
	13	8.00~13.00	13~26	14~26	3.0~30.0	M8	10	13	4	16	3.5
	13T		10~20	14~20	3.0~30.0	M6	9	13	4	16	3.5
	16	13.00~16.00	16~32	16~32	5.0~30.0	M8	12	16	4	19	4
	16T		10~24	14~24	5.0~30.0	M6	9	16	4	19	4
	20	16.00~20.00	20~40	20~40	5.0~30.0	M8	12	20	5	23	5.5
	20T		12~30	18~30	5.0~30.0	M6	9	20	5	23	5.5



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRO仕瑞达