


带法兰滚珠轴承（小径・深沟）▶
双盖式

轴承、轴承座组件

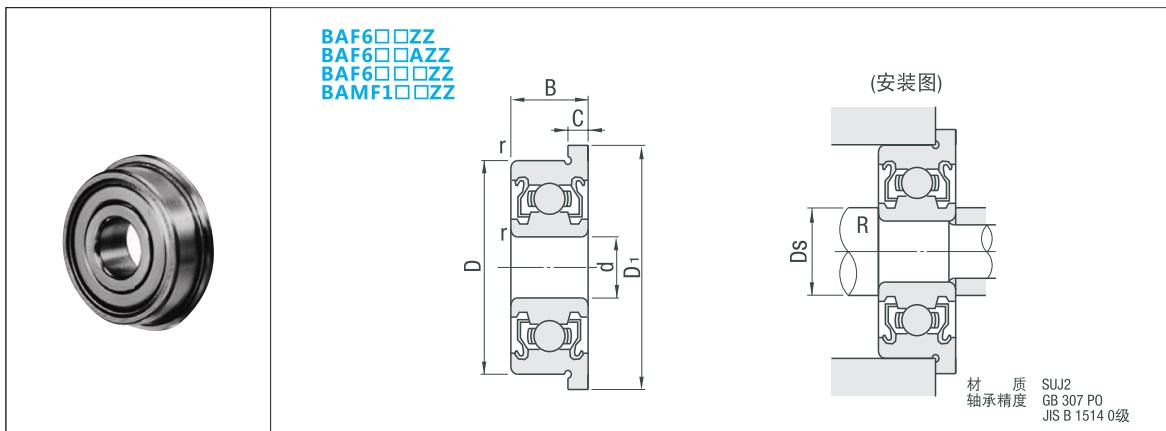

BAF6□□ZZ
BAF6□□ZZ
BAF6□□ZZ
BAMF1□□ZZ

材质 SUJ2
轴承精度 GB 307 P0
JIS B 1514 0级



型号
BAF698ZZ



型号区分：
交货期 5 天发货

型号	d	D	B	D ₁	C	r (min.)	基本额定负载		容许转速 rpm (参考)	安装尺寸		重量 (g) (参考)	
							Cr (动) N	Cor (静) N		Ds (min.)	R (max.)		
BAF682ZZ	2	5	2.3	6.1	0.6	0.08	169	50	85000	2.7	0.08	0.22	
BAF692ZZ		2.5	6	3.0	7.5	0.8	0.15	330	98	75000	3.0	0.15	0.48
BAF682ZZ			6	2.6	7.1			208	74	71000	3.7	0.08	0.36
BAF673ZZ	3	6	2.5	7.2	0.6	0.1	208	74	71000	3.6	0.08	0.33	
BAF683ZZ		7	3	8.1	0.8		390	130	63000	3.9	0.1	0.53	
BAF693ZZ		8	4	9.5	0.9	0.15	560	179	60000	4.2	0.15	0.97	
BAF603ZZ		9	5	10.5	1		570	187	56000			1.63	
BAF623ZZ		10	4	11.5	630		218	50000	1.86				
BAF674ZZ	4	7	2.5	8.2	0.6	0.1	222	88	60000	4.6	0.08	0.35	
BAF684ZZ		9		10.3	1		640	224	53000	5.0	0.1	1.14	
BAF694ZZ		4	11	4	12.5	0.15	715	276	48000	5.2	0.15	1.96	
BAF604ZZ			12		13.5		1	957		345	5.6	0.2	2.53
BAF624ZZ		13	5	15	0.2	1300	485	40000	3.53				
BAF675ZZ		5	8	2.5		9.2	0.6	0.1	217	91	53000	6.2	0.15
BAF685ZZ			11	5	12.5	1	0.15	715	281	45000	2.18		
BAF695ZZ	13		4	15	0.2		1080	430	43000	6.6	0.2	2.84	
BAF605ZZ	14			16			1330	505	40000	7.7	0.3	3.85	
BAF625ZZ	16		5	18	0.3		1729	670	36000			5.3	
BAF676ZZ	6	10	3	11.2	0.6	0.1	465	196	45000	6.6	0.1	0.77	
BAF686ZZ		13	5	15	1.1	0.15	1080	440	40000	7.0	0.15	3.04	
BAF696ZZ				17	1.2	0.2	1350	530		7.6	0.2	4.26	
BAF606ZZ		17	6	19	0.3	2190	835	38000	8	0.3	6.61		
BAF626ZZ		19		22		1.5	2336	885			32000	9.09	
BAF678ZZ	8	12	3.5	13.6	0.8	0.1	515	252	40000	8.8	0.1	1.15	
BAF688ZZ		16	5	18	1.1	0.2	1610	710	36000	9.6	0.2	4.47	
BAF698ZZ		19	6	22	1.5	0.3	1990	865		10	0.3	8.3	
BAF608ZZ		22	7	25			3350	1400	34000			13	
BAF6700ZZ	10	15	4	16.5	0.8	0.15	855	435	15000	10.3	0.15	2.1	
BAF6800ZZ		19	5	21	1	0.3	1716	840	37000	12	0.3	6.1	
BAF6900ZZ		22	6	25	1.5		2695	1273	34000	13.2		11.1	
BAF6701ZZ		12	18	4	19.5	0.8	0.2	926	530	13000	12.4	0.2	3.4
BAF6801ZZ	21		5	23	1.1	0.3	1915	1041	33000	14	0.3	7.1	
BAF6901ZZ	24		6	26.5	1.5		2886	1466	31000			13.2	
BAF6702ZZ	21		4	22.5	0.8	0.2	937	582	11000	15.4	0.2	3.9	
BAF6802ZZ	15		24	5	26	1.1	0.3	2073	1253	28000	17	0.3	8.3
BAF6902ZZ		28	7	30.5	1.5	4321		2259	26000	19.9			
BAF6703ZZ	17	23	4	24.5	0.8	0.2	1000	658	9500	17.4	0.2	4.4	
BAF6803ZZ		26	5	28	1.1	0.3	2233	1456	26000	19	0.3	8.9	
BAF6903ZZ		30	7	32.5	1.5		4588	2565	23000			21.4	
BAF6704ZZ		27	4	28.5	0.8	0.2	1041	729	8500	20.4	0.2	6.3	
BAF6804ZZ	20	32	7	35	1.5	0.3	4015	2462	21000	22	0.3	19.8	
BAF6904ZZ		37		40	2		6381	3682	19000			42.8	
BAF6805ZZ		25	7		40	1.5	0.3	4303	2932	18000	27	0.3	26.1
BAF6905ZZ	42		9	45	2	7001		4540	16000	50.2			

■标准尺寸

型号	d	D	B	D ₁	C	r (min.)	基本额定负载		容许转速 rpm (参考)	安装尺寸		重量 (g) (参考)
							Cr (动) N	Cor (静) N		Ds (min.)	R (max.)	
BAMF104ZZ	4	10	4	11.6	0.8	0.15	710	270	48000	5.9	0.15	1.5
BAMF105ZZ	5			430			168	50000	6	1.38		
BAMF126ZZ	6	12		13.6			715	292	43000	7.2		1.86
BAMF148ZZ	8	14		15.6			817	385	38000	9.26		2.42



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRO仕瑞达