



平皮带/圆皮带/滑轮/惰轮

圆皮带用滑轮

夹持型



型号 ①代码 · ②P.D. — ③皮带半径/R — ④d

CDRDC30

1.5

5

■ 请按步骤①~④选择型号和参数后进行订购。



型号区分:


代码

7 天发货

■ 夹持型



代码	材质	表面处理	附件
梯形槽 CDRDC	CDRC	S45C	发黑
U形槽 CDRAC	CDRC	铝合金	本色阳极氧化处理
			内六角螺栓(×2)SCM435
			内六角螺栓(×2)不锈钢

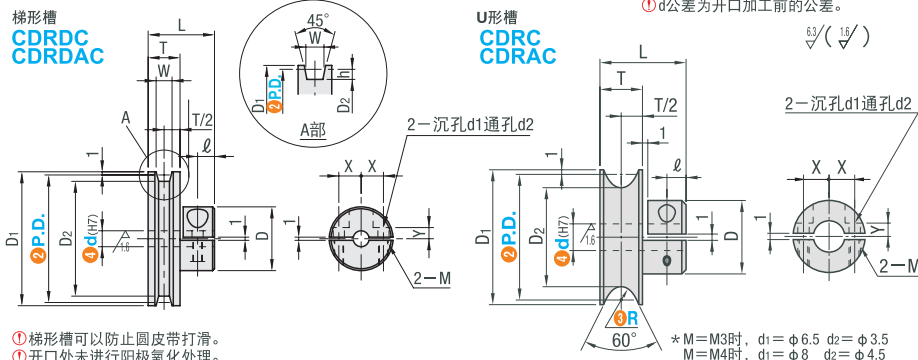梯形槽
CDRDC
CDRACU形槽
CDRC
CDRAC

- ① 梯形槽可以防止圆皮带打滑。
 ② 开口处未进行阳极氧化处理。

型号	①代码	②P.D.	③皮带半径/R	④d(H7) 选择	D	D1	D2	h	W	L	T	ℓ	X	Y	M (粗牙螺纹)	适用皮带直径
梯形槽 CDRDC CDRAC	1	20	1	4 5	16	22	18	1	2.2	11	5	2.5	5	3	M3	2
		30		4 5 6 6.35 8	20	32	28									
		40				42	38									
	1.5	30	1.5	5 6 6.35 8	20	32	27	1.5	3.3	16	10	2.5	7	3.5	M3	3
		40				42	37									
		45				47	42									
	2	60	2	5 6 6.35 8 10 11 12	25	62	57	1.5	3.3	20	10	4.5	9	4.5	M4	4
		23				25	19									
		28				30	24									
	2.5	30	2.5	5 6 6.35 8	20	32	26	2	4.4	16	10	2.5	7	3.5	M3	5
		40				42	36									
		45				47	41									
U形槽 CDRC CDRAC	2.5	48	2.5	5 6 6.35 8 10 11 12	25	50	44	2	4.4	20	10	4.5	9	4.5	M4	5
		60				62	56									
		75				82	76									
	3	28	3	5 6 6.35 8	20	30	23	2.5	5.5	16	10	2.5	7	3.5	M3	6
		38		5 6 6.35	20	40	32									
		48				50	42									
	3	50	3	5 6 6.35 8	25	52	44	3	6.6	20	10	4.5	9	4.5	M4	6
		58				60	52									
		60		5 6 6.35 8 10 11 12	25	62	54									
	3	75	3			77	69	3	6.6	20	10	4.5	9	4.5	M4	6
		95				97	89									
		100				102	94									



型号 ①代码 · ②P.D. — ③皮带半径/R — ④d (DC)

CDRD40

1.5

6

DC

CDRDC40

2

5

DC

可选加工


外径切割

代码

DC

技术说明

切割D1尺寸, 减小外径。
 (指定方法) DC



皮带半径/R	适用 DC
1	PD+0.8
1.5	PD+1.2
2	PD+1.6
2.5	PD+1.8

- ① 外径切割的加工面可能不进行表面处理。
 ② 仅适用于皮带半径R 1 · 1.5 · 2 · 2.5的产品

询价④种方式



官网 <http://www.srdfaa.com>
 深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
 客服热线 0755-27926613