




型号(1代码·2D) — 3P — 4L
DAAF10 — P4.00 — L8.5

■ 请按步骤①~④选择型号和参数后进行订购。




型号区分: 7 天发货
代码

■ 标准型



代码		材质	表面处理	硬度
D尺寸p6	D尺寸m6			
DAAFP	DAAF	SKS3	—	淬火硬度56~60HRC
DAAFBP	DAAFB	SKS3	发黑	淬火硬度56~60HRC
DAAFMP	DAAFM	SKS3	无电解镍	淬火硬度56~60HRC
DAAFCP	DAAFC	SUS440C	—	淬火硬度50~55HRC
DAAFSP	DAAFS	SUS304	—	—

D	D公差	
	p6	m6
5	+0.020 +0.012	+0.012 +0.004
7	+0.024 +0.015	+0.015 +0.006
8	+0.024 +0.015	+0.015 +0.006
10	+0.024 +0.015	+0.015 +0.006
12	+0.029 +0.018	+0.018 +0.007
15	+0.029 +0.018	+0.018 +0.007
18	+0.029 +0.018	+0.018 +0.007
20	+0.029 +0.018	+0.018 +0.007
22	+0.035 +0.022	+0.021 +0.008
25	+0.035 +0.022	+0.021 +0.008
26	+0.035 +0.022	+0.021 +0.008
30	+0.042 +0.026	+0.025 +0.009
35	+0.042 +0.026	+0.025 +0.009

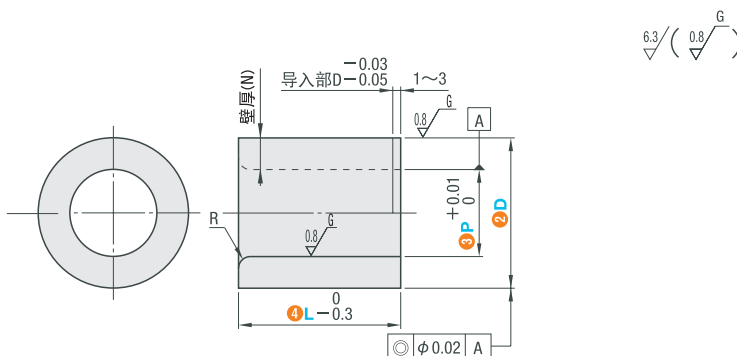

型号		3P 最小单位0.01mm	4L 最小单位0.1mm	壁厚 (N)	R
1 代码	2 D				
<p6> DAAFP DAAFBP DAAFMP DAAFCP DAAFSP	5	2.00~2.50	5.0~6.0	1.25~1.50	0.8
	7	2.00~3.50	5.0~8.0	1.75~2.50	0.8
	8	3.00~4.50	5.0~13.0	1.75~2.50	1.0
	10	4.00~6.50	5.0~20.0	1.75~3.00	1.0
	12	6.00~8.50	5.0~20.0	1.75~3.00	2.0
	15	8.00~10.50	5.0~40.0	2.25~3.50	2.0
	18	10.00~12.50	5.0~40.0	2.75~4.00	2.0
	20	12.00~13.50	5.0~40.0	3.25~4.00	2.0
	22	12.00~13.50	5.0~40.0	4.25~5.00	2.0
	25	13.00~15.50	5.0~40.0	4.75~6.00	2.0
	26	15.00~16.50	5.0~40.0	4.75~5.50	2.0
	30	16.00~20.50	5.0~60.0	4.75~7.00	3.0
	35	20.00~25.00	5.0~60.0	5.00~7.50	3.0
<m6> DAAF DAAFB DAAFM DAAFC DAAFS	5	2.00~2.50	5.0~6.0	1.25~1.50	0.8
	7	2.00~3.50	5.0~8.0	1.75~2.50	0.8
	8	3.00~4.50	5.0~13.0	1.75~2.50	1.0
	10	4.00~6.50	5.0~20.0	1.75~3.00	1.0
	12	6.00~8.50	5.0~20.0	1.75~3.00	2.0
	15	8.00~10.50	5.0~40.0	2.25~3.50	2.0
	18	10.00~12.50	5.0~40.0	2.75~4.00	2.0
	20	12.00~13.50	5.0~40.0	3.25~4.00	2.0
	22	12.00~13.50	5.0~40.0	4.25~5.00	2.0
	25	13.00~15.50	5.0~40.0	4.75~6.00	2.0
	26	15.00~16.50	5.0~40.0	4.75~5.50	2.0
	30	16.00~20.50	5.0~60.0	4.75~7.00	3.0
	35	20.00~25.00	5.0~60.0	5.00~7.50	3.0

① P≤3.59时, L≤P×2.5 P≥3.60时, L≤P×3.0 ② (D-P)/2≤2时, R为2以下。



型号(1代码·2D) — 3P — 4L — (RS)
DAAFP20 — P12.00 — L20.0 — RS

可选加工	代码	技术说明
加工粘接槽 L≤13.0时 L>13.0时	RS	加工粘接用槽。 ① 外径槽数 • L≤13.0时→加工2个 • L>13.0时→加工3个 指定方法 RS ① D≤13时、D-P≥3 ② D≥14时、D-P≥4 ⊗ 薄壁型不适用 ⊗ L<9.0不适用



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达