



直线导轨

微型直线导轨 宽幅型 标准滑块型



型号(1代码·2H) — (3L)
AGWP12 — 200

■ 请按步骤①~③选择型号和参数后进行订购。




型号区分: 7 天发货
代码




材质 硬度	代码		滑块 数量
	微预压型 精密级	普通间隙型 普通级	
不锈钢 56HRC~	AGWP	AGWC	1
	AGW2P	AGW2C	2


耐热温度: -20~80℃



H9 · 12 · 14



H16

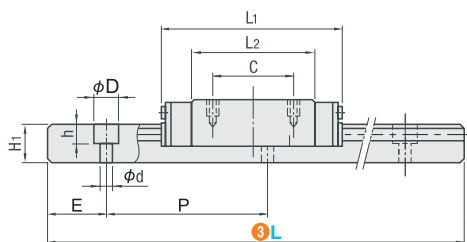


型号		2H	3L	滑块尺寸							导轨尺寸					
1 代码	W			L1	B	C	S×ℓ	L2	K	W1	W2	H1	沉孔	P	E	
													d×D×h			
(单滑块) AGWP AGWC	(双滑块) AGW2P AGW2C	9	50~290	25	31.5	19	10	M3×3	22	1.7	14	5.5	5.5	3.5×6×3.2	30	最小单位1mm。 (E尺寸为两端均分)
	12	50~290	30	39	21	12	M3×3	28.6	2.5	18	6	7	3.5×6×4.5	30		
	14	70~470	40	44	28	15	M3×3.5	31	3.2	24	8	8	4.5×8×4.5	40		
	16	70~670	60	55	45	20	M4×4.5	40	13	42	9	9.5	4.5×8×4.5	40		

国际单位1N=0.102kgf

■ 预压与精度基准

单位: μm

H	基本额定负载		静态容许力矩			重量	
	C(动) kN	Co(静) kN	MA N·m	MB N·m	MC N·m	滑块 kg	导轨 kg/m
9	1.35	2.1	7.7	7.7	15.4	0.02	0.50
12	2.1	3.5	13	16	30	0.04	0.96
14	3.2	5.2	20	21.5	51	0.08	1.40
16	5.5	8.2	40	41	142	0.15	2.95



规格	微预压型 精密级	普通间隙型 普通级
高度H的尺寸公差	±20	±20
宽度W2的尺寸公差	±25	±25
成对高度H公差	±15	±40
成对高度W2公差	±20	±40

