



型号(1代码·2D) — 3P — 4W — 5L
DAEH10 — P6.00 — W4.15 — L10

■ 请按步骤①~⑤选择型号和参数后进行订购。




型号区分: 7天发货
代码



代码	材质	表面处理	硬度
DAEH	SKS3	—	淬火硬度56~60HRC
DAEMH	SKS3	无电解镀镍	淬火硬度56~60HRC

6.3/(1.6/)

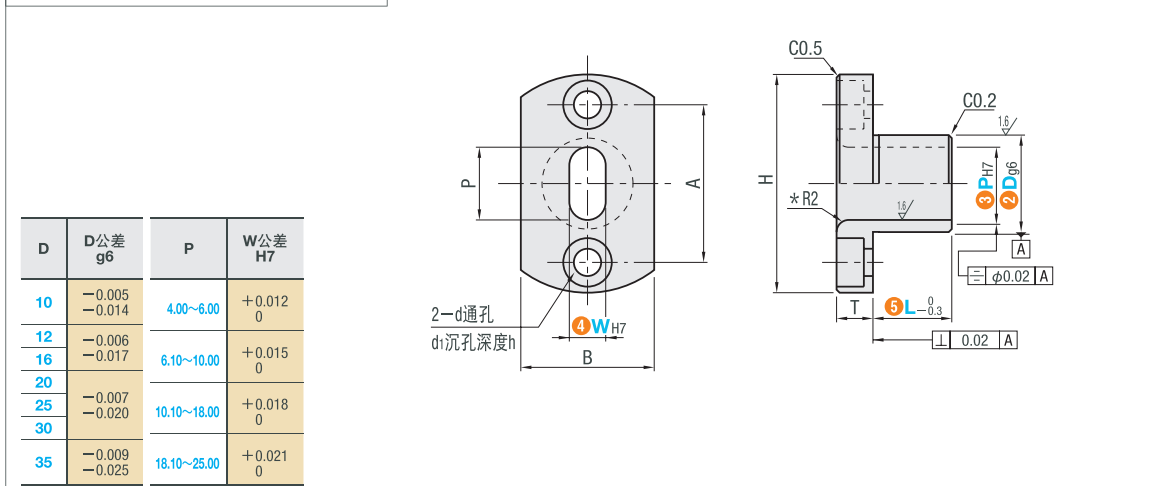

型号		3PH7	4WH7	5L	T	H	A	B	d	d1	h
1代码	2D	最小单位0.01mm	最小单位0.01mm	最小单位1mm							
DAEH DAEMH	10	4.00~8.00	3.00 ≤ W < P	8~40	5	25	17	12	3.3	6.5	3.5
	12	4.00~10.00			5	28	20	15	3.3	6.5	3.5
	16	8.00~14.00			6	36	26	22	4.5	8	4.5
	20	10.00~18.00			6	40	30	25	4.5	8	4.5
	25	13.00~22.00			6	44	34	30	4.5	8	4.5
	30	16.00~25.00			8	56	42	35	6.6	11	6.5
	35	18.00~25.00			8	60	46	40	6.6	11	6.5

① L+T ≤ P×3



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRO仕瑞达