

定位销 小头锥角型 内螺纹型·P尺寸固定型

定位销/夹具衬套



型号 (1 代码 · 2 D) — (3 P)
DAJSTB6 — 5

■ 请按步骤 1~3 选择型号和参数后进行订购。




型号区分: 7 天发货
代码



代码	材质	硬度
内螺纹型		
DAJSTB	SKS3	淬火硬度60~63HRC
DACJSTB	SUS440C	淬火硬度50~55HRC
DASJSTB	SUS304	—


■ D尺寸公差

D	g6
6	-0.004 -0.012
8	-0.005 -0.014
10	-0.006 -0.017
12	-0.006 -0.017

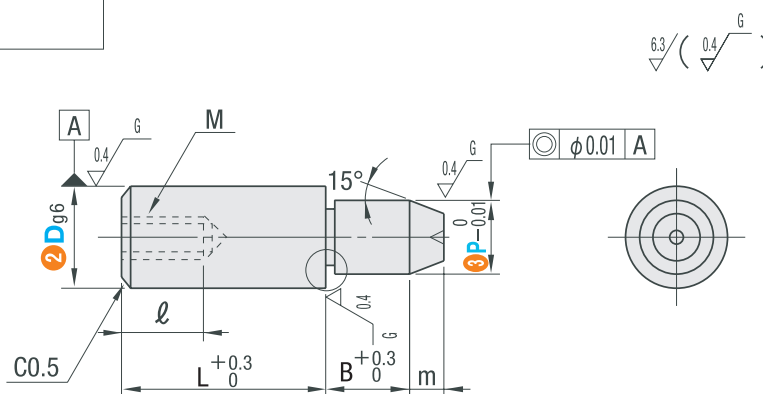

■ 内螺纹底孔表

螺纹直径	M3	M5
底孔直径d2	2.6	4.3
底孔深度U	9.5	14.5



型号		(3 P)选择	L	B	m	M (粗牙螺纹)	l
(1 代码)	(2 D)						
DAJSTB DACJSTB DASJSTB	6	4 5	10	5	2	M3	5
	8	6 7	15	6	3	M5	8
	10	7 8 9 10	15	8	3	M5	8
	12	8 9 10 11 12	15	8	3	M5	8



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达