



型号(1代码·2D)

DASFPG6
DAFPN3

3P

P5.00
P2.01

4L

L10
L6

5B

B10.0
B6.0

6E

E2.0
E2.0

■请按步骤①~③选择
型号和参数后进行订购。



型号区分:


代码

7天发货

■内螺纹型



代码	材质	表面处理	硬度
DAFPG	SKS3	—	淬火硬度60~63HRC
DAGFPG	SKS3	镀铬 厚度3 μm以上	淬火硬度50~55HRC 镀层硬度 750HV~
DASFPG	SUS304	—	—

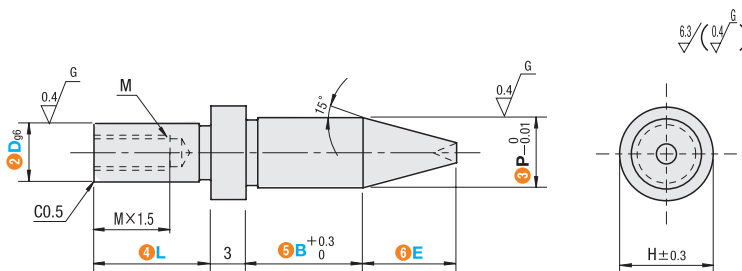

■D尺寸公差


D	D公差 g6
6	-0.004 -0.012
8	-0.005 -0.014
10	-0.005 -0.014

型号		3P	4L	5B	6E	H	M
1代码	2D	最小单位0.01mm	最小单位1mm	最小单位0.1mm	最小单位0.1mm		
DAFPG	6	4.00~ 7.00	6~12	2.0~12.0	0.5~10.0	8	M3
DAGFPG	8	5.00~ 9.00	8~16	2.0~15.0	0.5~10.0	11	M4
DASFPG	10	6.00~11.00	10~20	3.0~20.0	0.5~10.0	13	M5

■外螺纹型



代码	材质	表面处理	硬度
DAFPN	SKS3	—	淬火硬度60~63HRC
DAGFPN	SKS3	镀铬 厚度3 μm以上	淬火硬度60~63HRC 镀层硬度 750HV~
DACFPN	SUS440C	—	淬火硬度50~55HRC
DASFPN	SUS304	—	—

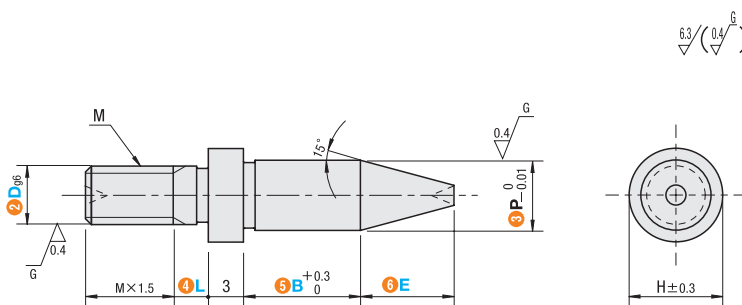

■D尺寸公差

D	D公差 g6
3	-0.002 -0.008
4	-0.004 -0.012
5	-0.004 -0.012
6	-0.004 -0.012
8	-0.005 -0.014
10	-0.005 -0.014

型号		3P	4L	5B	6E	H	M
1代码	2D	最小单位0.01mm	最小单位1mm	最小单位0.1mm	最小单位0.1mm		
DAFPN	3	2.00~ 5.00	0~12	2.0~10.0	0.5~10.0	6	M3
DAGFPN	4	2.00~ 5.00	0~12	2.0~10.0	0.5~10.0	6	M4
DACFPN	5	3.00~ 7.00	0~12	2.0~10.0	0.5~10.0	8	M5
DASFPN	6	4.00~ 7.00	0~12	2.0~12.0	0.5~10.0	8	M6
	8	5.00~ 9.00	0~12	2.0~15.0	0.5~10.0	11	M8
	10	6.00~11.00	0~12	2.0~20.0	0.5~10.0	13	M10

