



转轴

两端内螺纹·带键槽型

D公差 h9/h7/g6

■ 请按步骤①~①选择型号和参数后进行订购。



型号(①代码·②D)

③L

④M

⑤N

⑥KA

⑦A

⑧KB

⑨B

⑩KC

⑪C



型号区分

快购

7天发货

带1处键槽

BCSMKRW10

- 325

- M4

- N4

- KA20

- A50

带2处键槽

BCPSMKRW30

- 300

- M10

- N10

- KA20

- A50

- KB120

- B20

带3处键槽

BCSSMKRW25

- 350

- M8

- N8

- KA10

- A60

- KB90

- B30

- KC210

- C30


转轴

11



| 代码 | D公差 | 材质 | 表面处理 |
|----|-----|--------|-------------|
| ① | h9 | S45C | 发黑 无电解镀锌 |
| | | SUS304 | — |
| | | SUS304 | — |
| ② | h7 | S45C | 发黑 无电解镀锌 |
| | | SUS304 | — |
| | | SUS304 | — |
| ③ | g6 | S45C | 发黑 无电解镀锌 |
| | | SUS304 | — |
| | | SUS304 | — |

| 轴径 | b | | t | | r |
|-------|------|--------|------|-----------|---------------|
| | 基准尺寸 | 公差(N9) | 基准尺寸 | 公差 | |
| 6 | 2 | -0.004 | 1.2 | +0.1 0 | 0.08~ 0.16 |
| | 3 | -0.029 | 1.8 | | |
| | 4 | 0 | 2.5 | | |
| 12 | 4 | 0 | 3.0 | +0.1 0 | 0.16~ 0.25 |
| | 5 | -0.03 | 3.5 | | |
| | 6 | 0 | 4.0 | | |
| 25~30 | 8 | 0 | 4.0 | +0.2 0 | 0.25~ 0.4 |
| | 10 | -0.036 | 5.0 | | |
| | 12 | 0 | 5.0 | | |
| 50 | 14 | -0.043 | 5.5 | | |

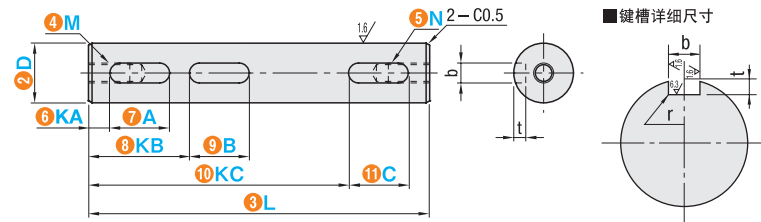

■ 键槽详细尺寸

①h9

| ①代码 | 型号 | | ③L 最小单位0.1mm | ④M(粗牙螺纹)·⑤N(粗牙螺纹) 选择 | | | | | | 键槽① ⑥KA·⑦A | | | 键槽② ⑧KB·⑨B | | | 键槽③ ⑩KC·⑪C | | | |
|---|------------|--------------------|-----------------|-------------------------|---|---|---|---|---|---------------|----|----|---------------|----|--|---------------|--|--|--|
| | ②Dh9 公差 | ③L 最小单位0.1mm | | 选择 | | | | | | 最小单位0.1mm | | | 最小单位0.1mm | | | 最小单位0.1mm | | | |
| BCSMKRW BCPSMKRW BCSSMKRW (BCSSMKRW不可选择D6) | 6 | $\frac{9}{-0.030}$ | 15.0~400.0 | 2.6 | 3 | 4 | | | | | | | | | | | | | |
| | 8 | 0 | 15.0~500.0 | 2.6 | 3 | 4 | 5 | 6 | | | | | | | | | | | |
| | 10 | -0.036 | 15.0~600.0 | | 3 | 4 | 5 | 6 | | | | | | | | | | | |
| | 12 | 0 | 15.0~700.0 | | | 4 | 5 | 6 | 8 | | | | | | | | | | |
| | 15 | -0.043 | 15.0~800.0 | | | | 4 | 5 | 6 | 8 | | | | | | | | | |
| | 20 | 0 | 30.0~1000.0 | | | | 4 | 5 | 6 | 8 | 10 | | | | | | | | |
| | 25 | 0 | 50.0~1000.0 | | | | 4 | 5 | 6 | 8 | 10 | 12 | | | | | | | |
| | 30 | -0.052 | 60.0~1000.0 | | | | | 6 | 8 | 10 | 12 | 16 | | | | | | | |
| | 35 | $\frac{9}{-0.062}$ | 70.0~1000.0 | | | | | | 6 | 8 | 10 | 12 | 16 | 20 | | | | | |

②h7(研磨棒)

| ①代码 | 型号 | | ③L 最小单位0.1mm | ④M(粗牙螺纹)·⑤N(粗牙螺纹) 选择 | | | | | | 键槽① ⑥KA·⑦A | | | 键槽② ⑧KB·⑨B | | | 键槽③ ⑩KC·⑪C | | | |
|---------------------------------|------------|--------------------|-----------------|-------------------------|---|---|---|---|---|---------------|----|----|---------------|----|----|---------------|--|--|--|
| | ②Dh7 公差 | ③L 最小单位0.1mm | | 选择 | | | | | | 最小单位0.1mm | | | 最小单位0.1mm | | | 最小单位0.1mm | | | |
| BCSHKRW BCPSHKRW BCSSHKRW | 6 | $\frac{9}{-0.012}$ | 15.0~400.0 | 2.6 | 3 | 4 | | | | | | | | | | | | | |
| | 8 | 0 | 15.0~500.0 | 2.6 | 3 | 4 | 5 | 6 | | | | | | | | | | | |
| | 10 | -0.015 | 15.0~600.0 | | 3 | 4 | 5 | 6 | | | | | | | | | | | |
| | 12 | 0 | 15.0~700.0 | | | 4 | 5 | 6 | 8 | | | | | | | | | | |
| | 15 | 0 | 15.0~800.0 | | | | 4 | 5 | 6 | 8 | | | | | | | | | |
| | 17 | -0.018 | 30.0~900.0 | | | | 4 | 5 | 6 | 8 | 10 | 12 | | | | | | | |
| | 20 | 0 | 30.0~1000.0 | | | | 4 | 5 | 6 | 8 | 10 | 12 | 16 | | | | | | |
| | 25 | 0 | 50.0~1000.0 | | | | | 5 | 6 | 8 | 10 | 12 | 16 | | | | | | |
| | 30 | -0.021 | 60.0~1000.0 | | | | | | 6 | 8 | 10 | 12 | 16 | | | | | | |
| | 35 | 0 | 70.0~1000.0 | | | | | | | 6 | 8 | 10 | 12 | 16 | 20 | | | | |
| 40 | 0 | 80.0~1000.0 | | | | | | | | 10 | 12 | 16 | 20 | 24 | | | | | |
| 50 | -0.025 | 100.0~1000.0 | | | | | | | | | 12 | 16 | 20 | 24 | 30 | | | | |

③g6

| ①代码 | 型号 | | ③L 最小单位0.1mm | ④M(粗牙螺纹)·⑤N(粗牙螺纹) 选择 | | | | | | 键槽① ⑥KA·⑦A | | | 键槽② ⑧KB·⑨B | | | 键槽③ ⑩KC·⑪C | | | |
|---|------------|------------------------|-----------------|-------------------------|---|---|---|---|----|---------------|----|----|---------------|----|--|---------------|--|--|--|
| | ②Dg6 公差 | ③L 最小单位0.1mm | | 选择 | | | | | | 最小单位0.1mm | | | 最小单位0.1mm | | | 最小单位0.1mm | | | |
| BCSGKRW BCPSGKRW BCSSGKRW (BCSSGKRW不可选择D13·16·18·22) | 6 | $\frac{8.994}{-0.005}$ | 15.0~400.0 | 2.6 | 3 | 4 | | | | | | | | | | | | | |
| | 8 | -0.005 | 15.0~500.0 | 2.6 | 3 | 4 | 5 | 6 | | | | | | | | | | | |
| | 10 | -0.014 | 15.0~600.0 | | 3 | 4 | 5 | 6 | | | | | | | | | | | |
| | 12 | 0 | 15.0~700.0 | | | 4 | 5 | 6 | 8 | | | | | | | | | | |
| | 13 | 0 | 15.0~700.0 | | | | 4 | 5 | 6 | 8 | | | | | | | | | |
| | 15 | -0.006 | 15.0~800.0 | | | | 4 | 5 | 6 | 8 | | | | | | | | | |
| | 16 | -0.017 | 15.0~900.0 | | | | 4 | 5 | 6 | 8 | 10 | | | | | | | | |
| | 17 | 0 | 30.0~900.0 | | | | 4 | 5 | 6 | 8 | 10 | 12 | | | | | | | |
| | 20 | 0 | 30.0~900.0 | | | | 4 | 5 | 6 | 8 | 10 | 12 | | | | | | | |
| | 22 | -0.007 | 40.0~1000.0 | | | | 4 | 5 | 6 | 8 | 10 | 12 | 16 | | | | | | |
| 25 | -0.020 | 50.0~1000.0 | | | | 4 | 5 | 6 | 8 | 10 | 12 | 16 | | | | | | | |
| 30 | 0 | 60.0~1000.0 | | | | | 6 | 8 | 10 | 12 | 16 | | | | | | | | |
| 35 | -0.009 | 70.0~1000.0 | | | | | | 6 | 8 | 10 | 12 | 16 | 20 | | | | | | |
| 40 | -0.025 | 80.0~1000.0 | | | | | | | 10 | 12 | 16 | 20 | 24 | | | | | | |
| 50 | 0 | 100.0~1000.0 | | | | | | | | 12 | 16 | 20 | 24 | 30 | | | | | |

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613