



型号 (1 代码 · 2 D) — (3 L)
EAFW10 — 35

■ 请按步骤 1 ~ 3 选择型号和参数后进行订购。




型号区分: 7 天发货
代码


■ 台阶定位销
标准型 · 螺纹型



EAFW
EAFWC (不锈钢)



EAFWM (螺纹型)
EAFWCM (不锈钢螺纹型)

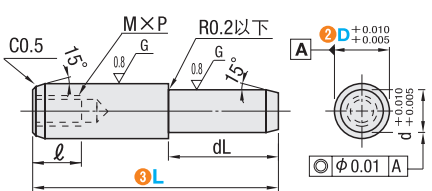

代码	材质	硬度
EAFW EAFWM	SUJ2	58HRC~
EAFWC EAFWCM	SUS440C	

型号		3 L	M x P	l	d	dL
1 代码	2 D					
EAFW EAFWC (不锈钢)	5	15	—	—	4	5
		25	—	—		10
EAFWM (螺纹型)	6	20	—	—	5	10
		30	3 x 0.5	6		15
EAFWCM (不锈钢螺纹型)	8	25	4 x 0.7	8	6	10
		35				15
	10	35	5 x 0.8	8	8	15
		40				15
	13	45	6 x 1.0	10	10	20
		55				25
		70				30



型号 (1 代码 · 2 D) — (3 L)
EAIP6 — 10

■ 请按步骤 1 ~ 3 选择型号和参数后进行订购。




型号区分: 7 天发货
代码

■ 绝缘定位销



EAIP

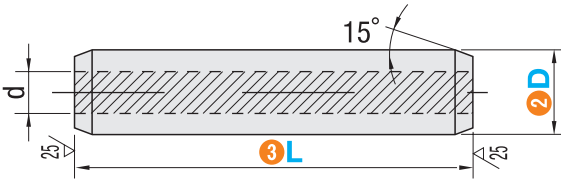

6.3 / (25 /)

主体: 胶木
金属芯: SUS304

型号		D 公差	d	3 L
1 代码	2 D			
EAIP	6	+0.03 0	3	8 10 15 20 25 30 35 40
	8		4	10 15 20 25 30 35 40
	9			15 20 25 30 35 40 45 50
	10		5	15 20 25 30 35 40 45 50
	12		6	20 25 30 35 40 45 50



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRO仕瑞达