



定位销/夹具衬套

定位销 大头平头型 标准型/DP公差选择型



■ 请按步骤①~④选择型号和参数后进行订购。

型号(①代码·②D公差·③P公差·④D) — ⑤P — ⑥L — ⑦B

DAKFAMS6

P8.00

L8

B6.0



型号区分:

代码

7 天发货

定位销
夹具衬套


20



代码	材质	表面处理	硬度
DAKFA	SKS3	—	淬火硬度60~63HRC
DAGKFA	SKS3	镀铬 厚度3 μm以上	淬火硬度50~55HRC 镀层硬度 750HV~
DACKFA	SUS440C	—	淬火硬度50~55HRC
DASKFA	SUS304	—	—

■ 公差选择

D 或 P	②·③ D·P公差				
	M	P	G	H	S
	m6	p6	g6	h7	—
1.00~3.00	+0.008 +0.002	+0.012 +0.006	-0.002 -0.008	0 -0.010	0 -0.01
3.01~6.00	+0.012 +0.004	+0.020 +0.012	-0.004 -0.012	0 -0.012	
6.01~10.00	+0.015 +0.006	+0.024 +0.015	-0.005 -0.014	0 -0.015	
10.01~18.00	+0.018 +0.007	+0.029 +0.018	-0.006 -0.017	0 -0.018	
18.01~30.00	+0.021 +0.008	+0.035 +0.022	-0.007 -0.020	0 -0.021	

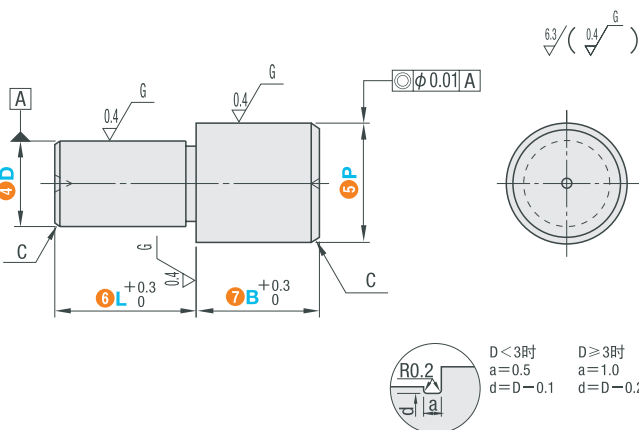

D < 3时
a = 0.5
d = D - 0.1

D ≥ 3时
a = 1.0
d = D - 0.2

型号				⑤P 最小单位0.01mm	⑥L 最小单位1mm	⑦B 最小单位0.1mm	C
① 代码	② D公差 选择	③ P公差 选择	④ D				
DAKFA DAGKFA DACKFA DASKFA	M P G H	M P G H S	1	1.50~3.00	2·3	2.0~5.0	0.1
			2	2.50~6.00	2~6	2.0~15.0	0.5
			3	3.50~8.00	3~10	2.0~15.0	1
			4	4.50~8.00	3(4)~14	2.0~15.0	1
			5	5.50~10.00	5~15	2.0~15.0	1
			6	6.50~10.00	5~15	2.0~30.0	1
			8	8.50~15.00	5~16	2.0~30.0	1.5
			10	11.00~17.00	5~20	3.0~30.0	2
			12	13.00~18.00	6~24	3.0~30.0	2
			13	14.00~20.00	7~26	5.0~30.0	2
			16	17.00~27.00	8~32	5.0~35.0	3
			20	22.00~30.00	10~40	5.0~40.0	3

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613