



垫圈/轴环/垫片

垫片环 固定型




型号(①代码·②d) — ③D — ④T
ECMRS6 — 12 — 0.1

■ 请按步骤①~④选择型号和参数后进行订购。




型号区分: 7 天发货
代码

■ 垫片环 — 固定型 —



固定型	材质	硬度	厚度(T)公差									
			0.01	0.02	0.03	0.05	0.1	0.2	0.3	0.5	1.0	
ECMRS	SUS304H	370~430HV	±0.003		±0.005		±0.02	±0.03	±0.035	±0.04	±0.05	
ECMR	SPCC	—	—	—	—	—	±0.03		±0.04	±0.06	±0.11	

Technical drawing showing a cross-section of a ring and a cross-section of a plate. The ring dimensions are: outer diameter $2d^{+0.3}_0$ and inner diameter $3D_{0-0.3}$. The plate thickness is $4T^{63}_{63}$. A checkmark symbol is present next to the plate thickness dimension.

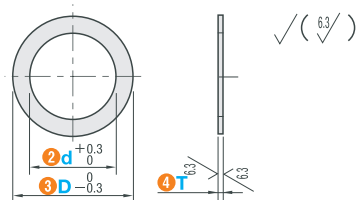

■ SUS304H

型号		③D 选择	④T 选择
① 代码	② d		
ECMRS	2	3 4 5 6	0.01 0.02 0.03 0.05 0.1 0.2 0.3 0.5 1.0
	3	4 5 6 7 8 9 10	
	4	5 6 7 8 9 10 12 13	
	5	7 8 9 10 12 13 14 15 16	
	6	8 9 10 12 13 14 15 16 18 20	
	8	10 12 13 14 15 16 18 20	
	10	12 13 14 15 16 18 20	
	12	15 16 18 20 21 22	
	15	18 20 21 22 24	
	16	20 21 22 24 28	
	17	20 21 22 24 28 30 32	
	20	24 28 30 32 35 40	
	22	28 30 32 35 40	
	25	30 32 35 40 42	
	28	32 35 40 42 45	
	30	35 40 42 45 50	
	35	42 45 50 55	
	40	45 50 55	
	45	50 55	

■ 黄铜 · SPCC

型号		③D 选择	④T 选择
① 代码	② d		
ECMR	2	4 5 6	(0.05) 仅ECMR 0.1 0.2 0.3 0.5 1.0
	3	5 6 7 8 10	
	4	6 7 8 10 12	
	5	7 8 10 12 14 16	
	6	8 10 12 14 16	
	8	12 14 16 18 20	
	10	12 14 16 18 20	
	12	16 18 20 21 22	
	15	18 20 21 22 24	
	16	20 21 22 24 28	
	17	20 21 22 24 28 30 32	
	20	24 28 30 32 35 40	
	22	28 30 32 35 40	
	25	30 32 35 40 42	
	28	32 35 40 42 45	
	30	35 40 42 45 50	
	35	42 45 50 55	
	40	45 50 55	
	45	50 55	

