



定位销/夹具衬套

进给销

直杆型（标准型）



型号(1代码·2D)

DAFSM3
DAFSMT5

3P

4L

5B

6E

— P3.50 — L3 — B6.0 — E2
— P6.00 — L7 — B8.0 — E8.6

■请按步骤①~④选择
型号和参数后进行订购。



型号区分:


代码

7天发货

■标准型



代码	材质	表面处理	硬度	D	D公差 m6
DAFSM	SKS3	—	淬火硬度60~63HRC	2	+0.008
DACFSM	SUS440C	—	淬火硬度50~55HRC	3	+0.002
DASFSM	SUS304	—	—	4	+0.012
				5	+0.004
				6	+0.012
				8	+0.015
				10	+0.006

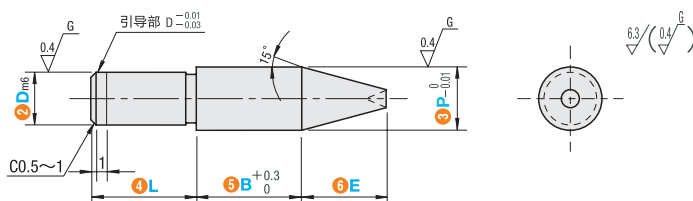


型号		3P 最小单位0.01mm	4L 最小单位1mm	5B 最小单位0.1mm	6E 最小单位0.1mm
1代码	2D				
DAFSM DACFSM DASFSM	2	2.50~ 5.00	2~ 6	2.0~10.0	0.5~10.0
	3	3.50~ 5.00	3~ 6	2.0~10.0	0.5~10.0
	4	4.50~ 7.00	4~ 8	2.0~10.0	0.5~10.0
	5	5.50~ 8.00	5~10	2.0~10.0	0.5~10.0
	6	6.50~10.00	6~12	2.0~12.0	0.5~10.0
	8	9.00~13.00	8~16	2.0~15.0	0.5~10.0
	10	10.00~13.00	10~20	2.0~20.0	0.5~10.0

■三角型



代码	材质	表面处理	硬度	D	D公差 m6
DAFSMT	SKS3	—	淬火硬度60~63HRC	2	+0.008
				3	+0.002
				4	+0.012
				5	+0.004
				6	+0.015
				8	+0.015
				10	+0.006

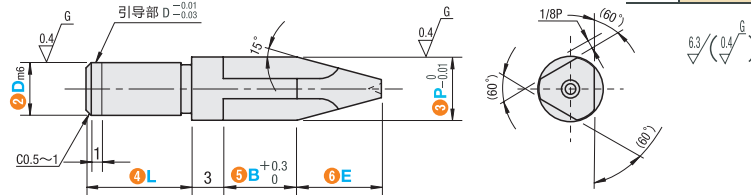

型号		3P 最小单位0.01mm	4L 最小单位1mm	5B 最小单位0.1mm	6E 最小单位0.1mm
1代码	2D				
DAFSMT	2	2.50~ 5.00	2~ 6	2.0~10.0	0.5~10.0
	3	3.50~ 5.00	3~ 6	2.0~10.0	0.5~10.0
	4	4.50~ 7.00	4~ 8	2.0~10.0	0.5~10.0
	5	5.50~ 8.00	5~10	2.0~10.0	0.5~10.0
	6	6.50~10.00	6~12	2.0~12.0	0.5~10.0
	8	9.00~13.00	8~16	2.0~15.0	0.5~10.0
	10	10.00~13.00	10~20	2.0~20.0	0.5~10.0

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613