

定位销/夹具衬套

◀ 夹具衬套 自由指定直柱型 薄壁型



型号(1 代码·2 D)

DAAUF10

3 P

P7.3

4 L

1.8.5

■ 请按步骤①~④选择型号和参数后进行订购。



型号区分:

代码


7 天发货

■薄壁型



代 码		材 质	表 面 处 理	硬 度
D尺寸p6	D尺寸m6			
DAAUFP	DAAUF	SKS3	—	淬火硬度56~60HRC
DAAUFBP	DAAUFB	SKS3	发黑	淬火硬度56~60HRC
DAAUFMP	DAAUFM	SKS3	无电解镀锌	淬火硬度56~60HRC
DAAUFCP	DAAUFC	SUS440C	—	淬火硬度50~55HRC

D	D公差	
	p6	m6
5	+0.020	+0.012
6	+0.012	+0.004
7		
8	+0.024	+0.015
9	+0.015	+0.006
10		
11		
12		
13		
14	+0.029	+0.018
15	+0.018	+0.007
16		
17		
18		
19		
20		
21		
22	+0.035	+0.021
25	+0.022	+0.008
26		
30		
31	+0.042	+0.025
35	+0.026	+0.009

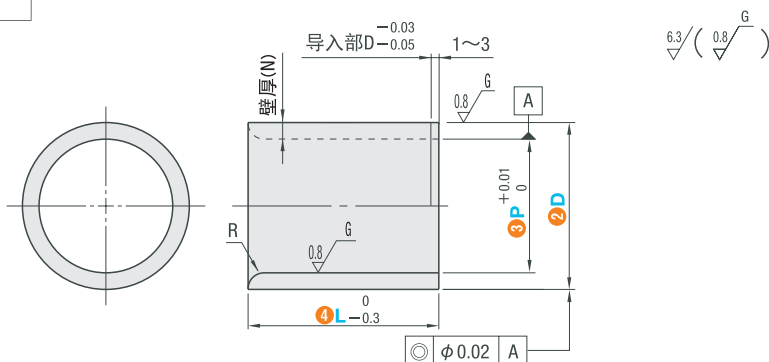

型号		3P	4L	壁厚 (N)	R
1 代码	2D	最小单位0.01mm	最小单位0.1mm		
< p6 > DAAUFP DAAUFBP DAAUFMP DAAUFCP	5	2.20~ 3.00	5.0~ 7.5	1.00~1.40	0.5以下
	6	3.00~ 4.00	5.0~ 8.0	1.00~1.50	0.5以下
	7	3.51~ 5.00	5.0~ 8.0	1.00~1.74	0.5
	8	4.51~ 6.00	5.0~13.0	1.00~1.74	0.5
	9	4.51~ 6.50	5.0~13.0	1.25~2.24	0.5
	10	6.51~ 8.00	5.0~20.0	1.00~1.74	0.5
	11	8.00~ 9.00	5.0~20.0	1.00~1.50	0.5
	12	8.51~ 9.00	5.0~20.0	1.50~1.74	0.5
	13	8.51~10.00	5.0~20.0	1.50~2.24	0.5
	14	9.00~11.00	5.0~20.0	1.50~2.50	0.5
	15	10.51~12.00	5.0~40.0	1.50~2.24	0.5
	17	10.51~13.00	5.0~40.0	2.00~3.24	1.0
	18	12.51~14.00	5.0~40.0	2.00~2.74	1.0
	19	12.51~14.00	5.0~40.0	2.50~3.25	1.0
	20	13.51~15.00	5.0~40.0	2.50~3.24	1.0
	21	13.51~15.00	5.0~40.0	3.00~3.75	1.0
	22	13.51~17.00	5.0~40.0	2.50~4.24	1.0
	25	15.51~19.00	5.0~40.0	3.00~4.74	1.0
	26	16.51~20.00	5.0~40.0	3.00~4.74	1.0
	30	20.51~24.00	5.0~40.0	3.00~4.74	1.5
31	20.51~24.00	5.0~60.0	3.50~5.24	1.5	
35	25.01~29.00	5.0~60.0	3.00~4.99	1.5	

⚠ $P \leq 3.59$ 时, $L \leq P \times 2.5$ $P \geq 3.60$ 时, $L \leq P \times 3.0$

询价④种方式

全国免费 400-966-3863
客服热线 0755-27926613