



弹簧/缓冲器/氮气弹簧

拉伸弹簧

中重载·重载型




型号(1代码·2D) — 3L
LBAT10 — 50

■请按步骤1~3选择型号和参数后进行订购。



型号区分: 5 天发货
代码

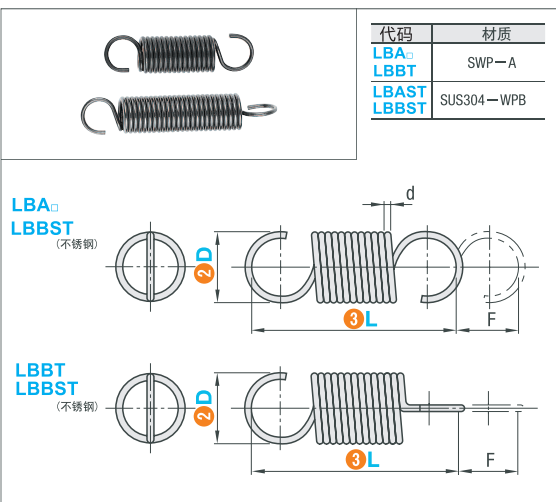

弹簧·缓冲器
氮气弹簧

32

■中重载型

型号		线径 dmm	动态负载时		(初始张力) N	(弹簧 常数) N/mm
① 代码	② D-③ L		最大 位移量 Fmax. mm	最大 负载 N		
LBAF	3-10	0.45	2.2	6.47	1.57	2.26
	15	0.45	4.5	6.47	1.57	1.08
	20	0.45	6.7	6.47	1.57	0.74
	25	0.45	9.1	6.47	1.57	0.54
	30	0.45	11.4	6.47	1.57	0.43
	4-15	0.55	4.5	8.43	1.86	1.47
	20	0.55	7.1	8.43	1.86	0.93
	25	0.55	10	8.43	1.86	0.66
	30	0.55	12.6	8.43	1.86	0.52
	35	0.55	15.2	8.43	1.86	0.43
	40	0.55	18.1	8.43	1.86	0.36
	5-15	0.7	3.9	14.71	2.45	3.14
	20	0.7	6.9	14.71	2.45	1.77
	25	0.7	9.6	14.71	2.45	1.28
	30	0.7	12.5	14.71	2.45	0.98
	35	0.7	15.6	14.71	2.45	0.78
	40	0.7	19.2	14.71	2.45	0.64
	45	0.7	21.9	14.71	2.45	0.56
	50	0.7	25	14.71	2.45	0.49
	6-20	0.9	3.9	23.54	5.88	4.51
	25	0.9	6	23.54	5.88	2.94
	30	0.9	7.8	23.54	5.88	2.26
	35	0.9	10	23.54	5.88	1.77
	40	0.9	12	23.54	5.88	1.47
	45	0.9	13.8	23.54	5.88	1.28
	50	0.9	16.4	23.54	5.88	1.08
	55	0.9	18	23.54	5.88	0.98
	60	0.9	20	23.54	5.88	0.88
	8-25	1.1	5.8	31.38	6.86	4.23
	30	1.1	8.3	31.38	6.86	2.94
	35	1.1	10.9	31.38	6.86	2.26
	40	1.1	13.2	31.38	6.86	1.86
	45	1.1	15.6	31.38	6.86	1.57
	50	1.1	18.5	31.38	6.86	1.32
	55	1.1	21.7	31.38	6.86	1.13
	60	1.1	23.8	31.38	6.86	1.03
	65	1.1	26.3	31.38	6.86	0.93
	70	1.1	27.8	31.38	6.86	0.88
	10-30	1.4	6.5	49.03	12.75	5.58
	35	1.4	8.7	49.03	12.75	4.17
40	1.4	10.7	49.03	12.75	3.39	
45	1.4	12.9	49.03	12.75	2.81	
50	1.4	15.2	49.03	12.75	2.39	
55	1.4	17.2	49.03	12.75	2.11	
60	1.4	19.5	49.03	12.75	1.86	
70	1.4	23.1	49.03	12.75	1.57	
80	1.4	27.4	49.03	12.75	1.32	
90	1.4	32.1	49.03	12.75	1.13	
100	1.4	46.2	49.03	12.75	0.79	
12-35	1.8	5	83.36	23.54	12	
40	1.8	7	83.36	23.54	8.55	
45	1.8	9	83.36	23.54	6.65	
50	1.8	11	83.36	23.54	5.44	
55	1.8	13	83.36	23.54	4.6	
60	1.8	14.5	83.36	23.54	4.13	
70	1.8	17.8	83.36	23.54	3.36	
80	1.8	21.3	83.36	23.54	2.81	
90	1.8	24.5	83.36	23.54	2.44	
100	1.8	27.5	83.36	23.54	2.18	

■重载型

型号		线径 dmm	动态负载时		(初始张力) N	(弹簧 常数) N/mm
1 代码	2D-3L		最大 位移量 Fmax. mm	最大 负载 N		
LBAT LBST LBST LBST LBST () 仅限 LBAT - LBAST	3-10	0.5	2	8.8	2.16	3.24
	15	0.5	3.7	8.8	2.16	1.77
	20	0.5	5.2	8.8	2.16	1.27
	25	0.5	6.8	8.8	2.16	0.98
	(30)	0.5	8.5	8.8	2.16	0.78
	4-15	0.6	4	11.1	2.55	2.16
	20	0.6	6.4	11.1	2.55	1.37
	25	0.6	8.4	11.1	2.55	0.98
	30	0.6	10.9	11.1	2.55	0.78
	(35)	0.6	12.4	11.1	2.55	0.69
	(40)	0.6	15	11.1	2.55	0.57
	5-15	0.8	2.9	20.79	5.1	5.39
	20	0.8	4.6	20.79	5.1	3.43
	25	0.8	6.4	20.79	5.1	2.45
	30	0.8	8.4	20.79	5.1	1.86
	35	0.8	10	20.79	5.1	1.57
	(40)	0.8	11.4	20.79	5.1	1.38
	45	0.8	13.3	20.79	5.1	1.18
	(50)	0.8	15.2	20.79	5.1	1.03
	6-20	1	3.7	33.15	8.6	6.57
	25	1	5.3	33.15	8.6	4.61
	30	1	6.9	33.15	8.6	3.53
	35	1	8.3	33.15	8.6	2.94
	40	1	10	33.15	8.6	2.45
	(45)	1	10.8	33.15	8.6	2.27
	(50)	1	12.5	33.15	8.6	1.96
	(55)	1	14.3	33.15	8.6	1.71
	(60)	1	15.6	33.15	8.6	1.57
	8-25	1.2	5.3	41.19	9.81	5.88
	30	1.2	7.3	41.19	9.81	4.31
	35	1.2	9.1	41.19	9.81	3.43
	40	1.2	11.9	41.19	9.81	2.65
	45	1.2	13.6	41.19	9.81	2.35
	50	1.2	15.5	41.19	9.81	2.06
	(55)	1.2	16.8	41.19	9.81	1.87
	(60)	1.2	18.8	41.19	9.81	1.67
	(65)	1.2	20.6	41.19	9.81	1.52
	(70)	1.2	22.8	41.19	9.81	1.38
	10-30	1.6	5.2	77.47	20.59	10.89
	35	1.6	6.8	77.47	20.59	8.34
	40	1.6	8.4	77.47	20.59	6.77
	45	1.6	10	77.47	20.59	5.69
	50	1.6	11.6	77.47	20.59	4.9
	55	1.6	13.2	77.47	20.59	4.31
	60	1.6	15.2	77.47	20.59	3.73
	(65)	1.6	17	77.47	20.59	3.35
	70	1.6	19.3	77.47	20.59	2.95
	(75)	1.6	20.7	77.47	20.59	2.75
	(80)	1.6	24.1	77.47	20.59	2.36
	(90)	1.6	26.3	77.47	20.59	2.16
(100)	1.6	29	77.47	20.59	1.96	
12-40	2	6.6	120.62	34.3	13.04	
45	2	7.7	120.62	34.3	11.18	
50	2	9.4	120.62	34.3	9.22	
55	2	10.5	120.62	34.3	8.24	
60	2	12.1	120.62	34.3	7.16	
65	2	13.1	120.62	34.3	6.57	
70	2	14.9	120.62	34.3	5.79	
75	2	16	120.62	34.3	5.39	
80	2	17.6	120.62	34.3	4.9	
(90)	2	19.1	120.62	34.3	4.52	
(100)	2	22	120.62	34.3	3.92	
14-40	2.3	5.8	154.95	45.11	19.02	
45	2.3	7	154.95	45.11	15.59	
50	2.3	8.4	154.95	45.11	13.14	
55	2.3	9.6	154.95	45.11	11.47	
60	2.3	10.9	154.95	45.11	10.1	
65	2.3	12.9	154.95	45.11	8.53	
70	2.3	14.2	154.95	45.11	7.75	
75	2.3	15.3	154.95	45.11	7.16	
80	2.3	16.7	154.95	45.11	6.57	
90	2.3	18.6	154.95	45.11	5.91	
100	2.3	21.1	154.95	45.11	5.21	
125	2.3	28	154.95	45.11	3.92	
16-50	2.6	7.5	195.15	55.9	18.63	
55	2.6	9	195.15	55.9	15.49	
60	2.6	10.4	195.15	55.9	13.34	
65	2.6	11.9	195.15	55.9	11.67	
70	2.6	13.4	195.15	55.9	10.4	
75	2.6	15	195.15	55.9	9.32	
80	2.6	16.5	195.15	55.9	8.43	
90	2.6	19.4	195.15	55.9	7.16	
100	2.6	22.4	195.15	55.9	6.18	
125	2.6	28.4	195.15	55.9	4.9	
150	2.6	35.5	195.15	55.9	3.92	
18-55	2.9	8.3	236.34	68.65	20.1	
60	2.9	10	236.34	68.65	16.67	
65	2.9	11.6	236.34	68.65	14.71	
70	2.9	12.5	236.34	68.65	13.44	
75	2.9	14.1	236.34	68.65	11.77	
80	2.9	15.8	236.34	68.65	10.79	
90	2.9	18.4	236.34	68.65	9.12	
100	2.9	21.6	236.34	68.65	7.75	
125	2.9	27.1	236.34	68.65	6.19	
150	2.9	34.2	236.34	68.65	4.9	
20-60	3.2	9.2	281.45	82.38	21.57	
70	3.2	11.9	281.45	82.38	16.67	
80	3.2	14.7	281.45	82.38	13.53	
90	3.2	17.5	281.45	82.38	11.38	
100	3.2	20.1	281.45	82.38	9.9	
125	3.2	27.8	281.45	82.38	7.16	
150	3.2	33.8	281.45	82.38	5.89	
175	3.2	40.6	281.45	82.38	4.9	
24-80	4	11.7	430.51	123.6	26.48	
90	4	13.7	430.51	123.6	22.46	
100	4	16.6	430.51	123.6	18.63	
125	4	22.5	430.51	123.6	13.63	
150	4	28.5	430.51	123.6	10.79	
175	4	34.4	430.51	123.6	8.92	
200	4	41.2	430.51	123.6	7.45	
225	4	41.2	430.51	123.6	7.45	

负载(kgf)=负载N×0.101972

询价4种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613