



型号(①代码·②d) — ③L
DAA12 — 10

■ 请按步骤①~③选择型号和参数后进行订购。




型号区分: 7 天发货
代码

■ 标准型



代码		材质	表面处理	硬度
D尺寸p6	D尺寸m6			
DAA	DAAM	SKS3	—	淬火硬度60HRC~
DAAN	DAAMN	SKS3	无电解镀镍	淬火硬度60HRC~
DAAC	—	SUS440C	—	淬火硬度50~55HRC

25 / (0.4 / G)

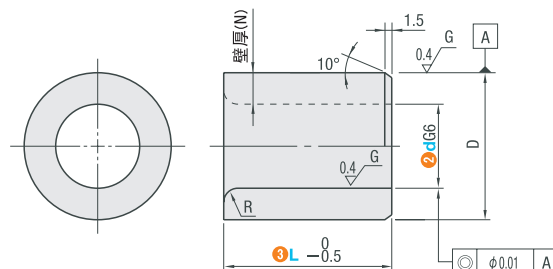

d	d公差	
	无表面处理	无电解镀镍
2	+0.008	+0.010
3	+0.002	0
4	+0.012 +0.004	H7 +0.012 0
5		
6	+0.014 +0.005	+0.014 +0.005
8		
10	+0.017 +0.006	G6 +0.017 +0.006
12		
13	+0.020 +0.007	+0.020 +0.007
15		
16	+0.020 +0.007	+0.020 +0.007
20		
25		

D	D公差	
	p6	m6
5	+0.020 +0.012	+0.012 +0.004
7	+0.024 +0.015	+0.015 +0.006
8		
10	+0.029 +0.018	+0.018 +0.007
12		
15	+0.035 +0.022	+0.021 +0.008
18		
22	+0.042 +0.026	+0.025 +0.009
25		
26	+0.042 +0.026	+0.025 +0.009
30		
35		

定位销
夹具衬套

20

型号		③L选择										D	壁厚 (N)	R		
① 代码	②d															
<p6> DAA DAAN DAAC	<m6> DAAM DAAMN	2	5	6	7	8	10	12					5	1.5	0.8	
		3	5	6	7	8	10	12					7	2	0.8	
		4	5	6	7	8	10	12	15	16	20		8	2	1	
		5	5	6	7	8	10	12	15	16	20		10	2.5	1	
		6	5	6	7	8	10	12	15	16	20	25	10	2	1	
		8	5	6	7	8	10	12	15	16	20	25	12	2	2	
		10		6	7	8	10	12	15	16	20	25	15	2.5	2	
		12				8	10	12	15	16	20	25	30	18	3	2
		13					10	12	15	16	20	25	30	22	4.5	2
		15						12	15	16	20	25	30	25	5	2
		16						12	15	16	20	25	30	26	5	2
		20						12	15	16	20	25	30	30	5	3
		25								16	20	25	30	35	5	3



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达