



定位销/夹具衬套

夹具衬套 防脱落切口型



型号(1代码·2D) —

3P —

4L

■请按步骤①~④选择型号和参数后进行订购。

DAHFYG18

— P12.00 —

L18.0



型号区分:

7天发货


代码

定位销
夹具衬套

20




代码	材质	硬度	附件
DAHFYG	SKS3	淬火硬度56~60HRC	特殊内六角螺栓1根

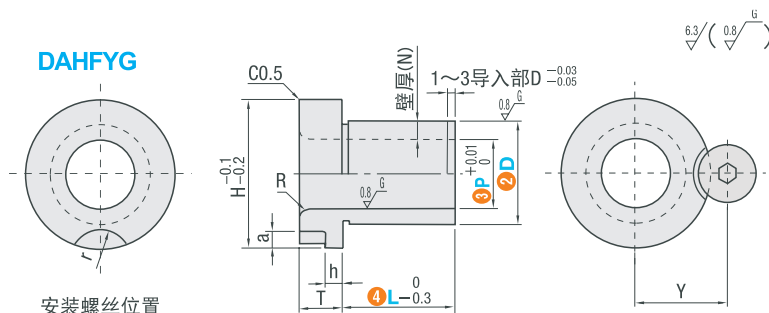

安装螺丝位置

(附属螺栓)

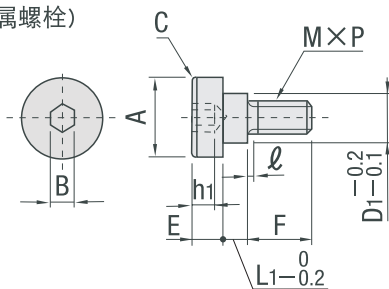

D	D公差 g6
10	-0.005 -0.014
12	-0.006 -0.017
15	-0.006 -0.017
18	-0.006 -0.017
20	-0.007 -0.020
22	-0.007 -0.020
25	-0.007 -0.020
26	-0.007 -0.020
30	-0.007 -0.020

型号		3P	4L	壁厚(N)	R	H	T	h	a	r	螺栓位置 Y	附件 特殊螺栓
1代码	2D	指定单位0.01mm	指定单位0.1mm									
DAHFYG	10	4.00~6.50	3.0~12.0	1.75~3.00	1	18	7.5	3	3	5.5	12	M4
	12	6.00~8.50	10.0~18.0	1.75~3.00	2	20	7.5	3	3	5.5	13	M4
	15	8.00~10.50	10.0~30.0	2.25~3.50	2	23	7.5	3	3	5.5	14.5	M4
	18	10.00~12.50	10.0~30.0	2.75~4.00	2	26	7.5	3	3	5.5	16	M4
	20	12.00~13.50	12.0~35.0	3.25~4.00	2	28	9.0	4	3	7.0	18	M5
	22	12.00~13.50	12.0~35.0	4.25~5.00	2	30	9.0	4	3	7.0	19	M5
	25	13.00~15.50	12.0~35.0	4.75~6.00	2	33	9.0	4	3	7.0	20.5	M5
	26	15.00~16.50	12.0~35.0	4.75~5.50	2	34	9.0	4	3	7.0	21	M5
	30	16.00~20.50	12.0~50.0	4.75~7.00	3	38	9.0	4	3	7.0	23	M5

①L+T≤P×3.0

■附属螺栓

D1	L1	A	E	M×P (粗牙螺纹)	F	ℓ	B	h1	C
6	3	10	4	4×0.7	8	1.2	3	3	0.5
8	4	12	4.5	5×0.8	10	1.4	4	3.5	0.5

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613