



# 脚轮/调整块

◀ 脚轮  
轻中载型



型号(①代码·②D) — ③轮材质  
HEAMS-E75 — U  
HEAMJ-E65 — R


■ 请按步骤①~③选择型号和参数后进行订购。




型号区分:

代码:

7 天发货

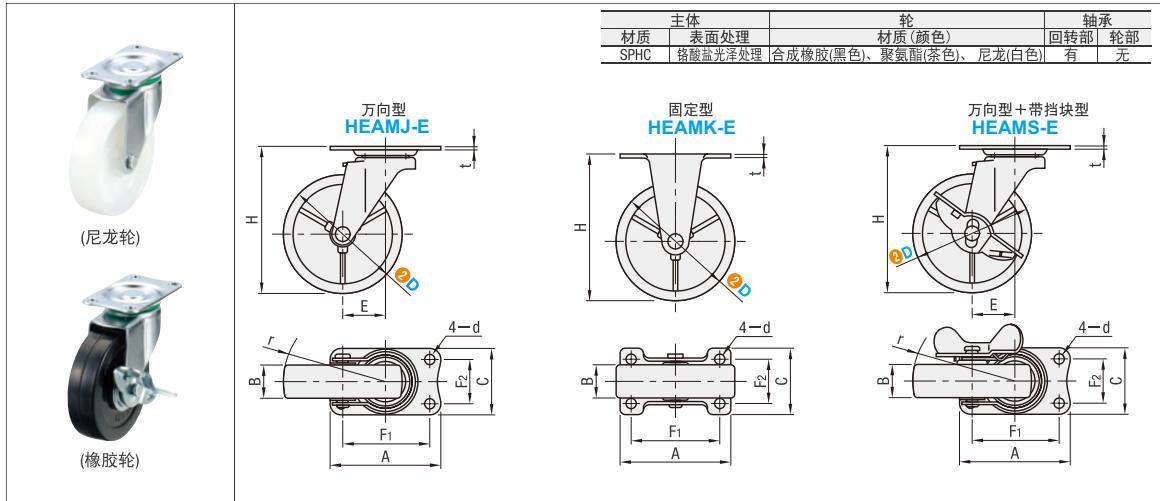

主体类型	型号 ①代码 ②D	③轮材质	主体								轮			轴承				
			H	A	C	F1	F2	d	E	r	B	t	R	U	N	R	U	N
万向型	HEAMJ-E	R (橡胶)	65					6.5	22	47	20	21	300	380	400	180	165	150
			82	70	42	56	28		23	56	21		400	400	450	250	200	190
			92					27	65	21			400	450	500	285	215	200
固定型	HEAMK-E	N (尼龙)	50					6.5			20	21	300	380	400	140	120	110
			65	70	42	56	28				21		400	400	450	195	145	135
			75										400	450	500	230	160	145
万向型+带挡块型	HEAMS-E	N (尼龙)	50					6.5	22	47	20	21	300	380	400	205	185	170
			82	70	42	56	28		23	56	20		400	400	450	285	215	215
			92					27	65	21			400	450	500	320	250	230

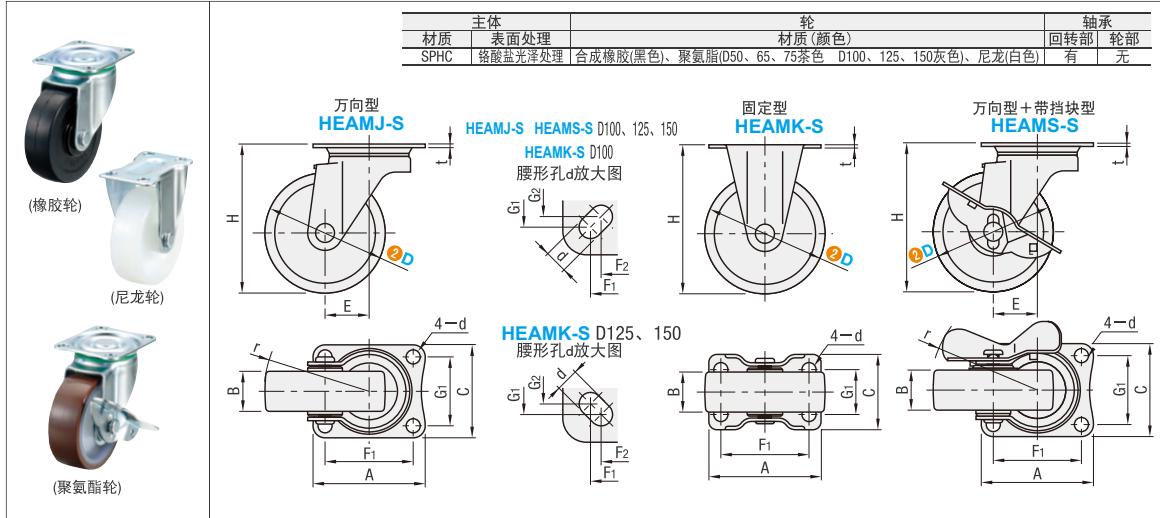

主体类型	型号 ①代码 ②D	③轮材质	主体								轮			轴承									
			H	A	C	F1	F2	G1	G2	d	E	r	B	t	R	U	N	R	U	N			
万向型	HEAMJ-S	R (橡胶)	65							8.8	27	61	25	25	2.3	500	600	700	375	325	310		
			93	70	58	55	—	42	—		28	66	25	26		600	700	800	420	345	325		
			100								32	83	32	32		1200	1000	1200	920	790	770		
			125								40	105	38	40		1500	1300	1500	1505	1465	1315		
			150								115	40				1600	1400	1600	1710	1585	1490		
固定型	HEAMK-S	U (聚氨酯)	65	70	47	55	—	28	—	8.8			25	25	2.3	500	600	700	250	200	185		
			75										25	26		600	700	800	295	220	200		
			100										32	32	2.6	1200	1000	1200	740	610	585		
			125										38	40		3.0	1500	1300	1500	1135	1090	945	
万向+带挡块型	HEAMS-S	N (尼龙)	65										25	25	2.6	1600	1400	1600	1290	1160	1100		
			93	70	58	55	—	42	—		28	68	25	26		500	600	700	430	375	350		
			100										32	86	32	32		600	700	800	470	380	360
			125										40	108	38	40		1200	1000	1200	1005	875	850
			150										115	40				1500	1300	1500	1690	1650	1505

