



① 型号 — ② V — ③ D — ④ L  
 ECNLCH — V10.5 — D19.5 — L50.5

■ 请按步骤①~④选择型号和参数后进行订购。



型号区分: 7 天发货  
 代码




型号		材质	表面处理	硬度
普通级	精密级			
ECNLCH	ECAU	S45C	—	45~50HRC
ECNLBH	ECAUC		发黑	
ECNLMH	ECPAUC		无电镀锌镍	
ECNSK	ECAUK		—	
ECNSKB	ECAUKB	SKS3	发黑	55HRC~
ECNSKM	ECAUKM		无电镀锌镍	
ECNSH	ECSAUCH	SUS440C	—	45~50HRC


① 加工条件

- 壁厚和全长的加工极限  
 $10.0 \leq L \leq 50.0 \rightarrow (D-V)/2 \geq 1$   
 $50.1 \leq L \leq 100.0 \rightarrow (D-V)/2 \geq 3$
- 壁厚和全长的加工极限(材质SKS3)  
 $4 \leq D \leq 10 \rightarrow V \leq D-2$   
 $10.5 \leq D \leq 30 \rightarrow V \leq D-4$   
 $31 \leq D \leq 60 \rightarrow V \leq D-6$   
 $61 \leq D \leq 80 \rightarrow V \leq D-8$   
 $81 \leq D \leq 100 \rightarrow V \leq D-10$
- V和全长的加工极限  
 $L \leq V \times 8$

普通级



精密级

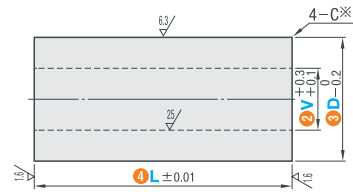

① 型号	② V 0.5mm (V尺寸在3以上)	③ D	④ L 最小单位0.1mm
—普通级— ECNLCH ECNLBH ECNLMH ECNSK ECNSKB ECNSKM ECNSH	(选择) 2.0 2.6	4.0~10.0 (单位0.5mm)	10.0~60.0
—精密级— ECAU ECAUC ECPAUC ECAUK ECAUKB ECAUKM ECSAUCH	3.0~90.0 (最小单位0.5mm)	10.5~20.0 (单位0.5mm) 21.0~100.0 (单位1mm)	10.0~100.0

