


代码	材质	表面处理	附件
ABSTBN	S45C	发黑	1个内六角止动螺丝
ABSTMN		无电解镀锌	1个内六角止动螺丝(SUS)

❗ D尺寸30~50有2个附属螺栓。

① 安装孔D按容差H7加工后, 进行开口加工。有可能因加工增至H8左右。

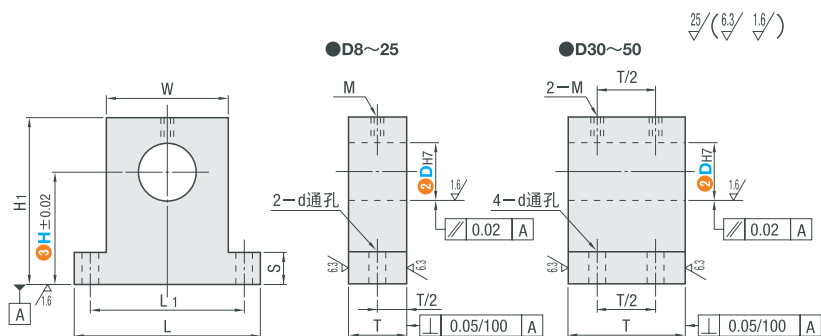

1 代码 2 D — 3 H
ABSTBN35 — 50

■请按步骤①~③选择型号和参数后进行订购。



型号区分：
代码 **7** 天发货

型号		高度选择								L	H ₁	T	S	W	L ₁	d	止动螺丝 M	
① 代码	② D	③ H																
ABSTBN ABSTMN	8	10	15	20	25	30	40			42	H+9	15	6	18	30	6.6	M6	
	10	10	15	20	25	30	40	50	60	42	H+10	15	6	18	30	6.6		
	12	10	15	20	25	30	40	50	60	42	H+11	18	6	18	30	6.6		
	13		15	20	25	30	40	50	60	42	H+12	18	6	18	30	6.6		
	15		15	20	25	30	40	50	60	54	H+15	20	6	30	42	6.6		
	16		15	20	25	30	40	50	60	54	H+15	20	6	30	42	6.6		
	20			20	25	30	40	50	60	80	67	H+18	25	8	35	50	9	M8
	25			20	25	30	40	50	60	80	67	H+20	30	8	35	50	9	
	30				25	30	40	50	60	80	85	H+23	35	10	45	65	6.6	
	35				25	30	40	50	60	80	85	H+25	35	10	45	65	6.6	
	40					30	40	50	60	80	100	H+30	40	10	60	80	9	
	50						40	50	60	80	125	H+38	50	15	75	100	11	



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达